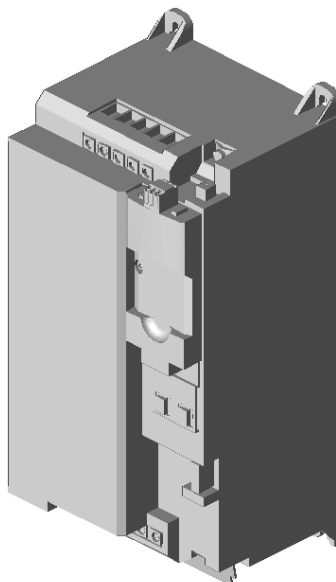


seria prod. przem. częstotl.

I55BE318F10V10002S

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16648820_3D.stp
16648820_datatable.csv
16648820_datatable.xls

Obsługa myszy w modelu 3D



Informacje techniczne o produkcie

seria prod. przem. częstotl.
inwerter
typ
moc znamionowa
moc znamionowa LD
znamionowe nap. zasilania
prąd wyjściowy
prąd wyjściowy LD
filtr przeciwzakłóceńowy
częstotliwość wyjściowa
rozszerzenie I/O
sieciowa magistr. przemysłowa
stopień ochrony
Miejsce montażu
Waga / Jednostka


przemiennik częstotliwości550
i550-C18/400-3
I55BE318F10V10002S
18.5 kW/25 HP
22 kW/30 HP
3/PE 400/480 V AC
40/34 A
48/40.8 A
zintegrowane
0-599 Hz
standard I/O
CANopen
IP20
Szafa sterownicza
8.520 KG

15 kW ... 30 kW

The dimensions in mm apply to:

15 kW	I55BE315F
18.5 kW	I55BE318F
22 kW	I55BE322F
30 kW	I55BE330F
Weight	8 kg

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

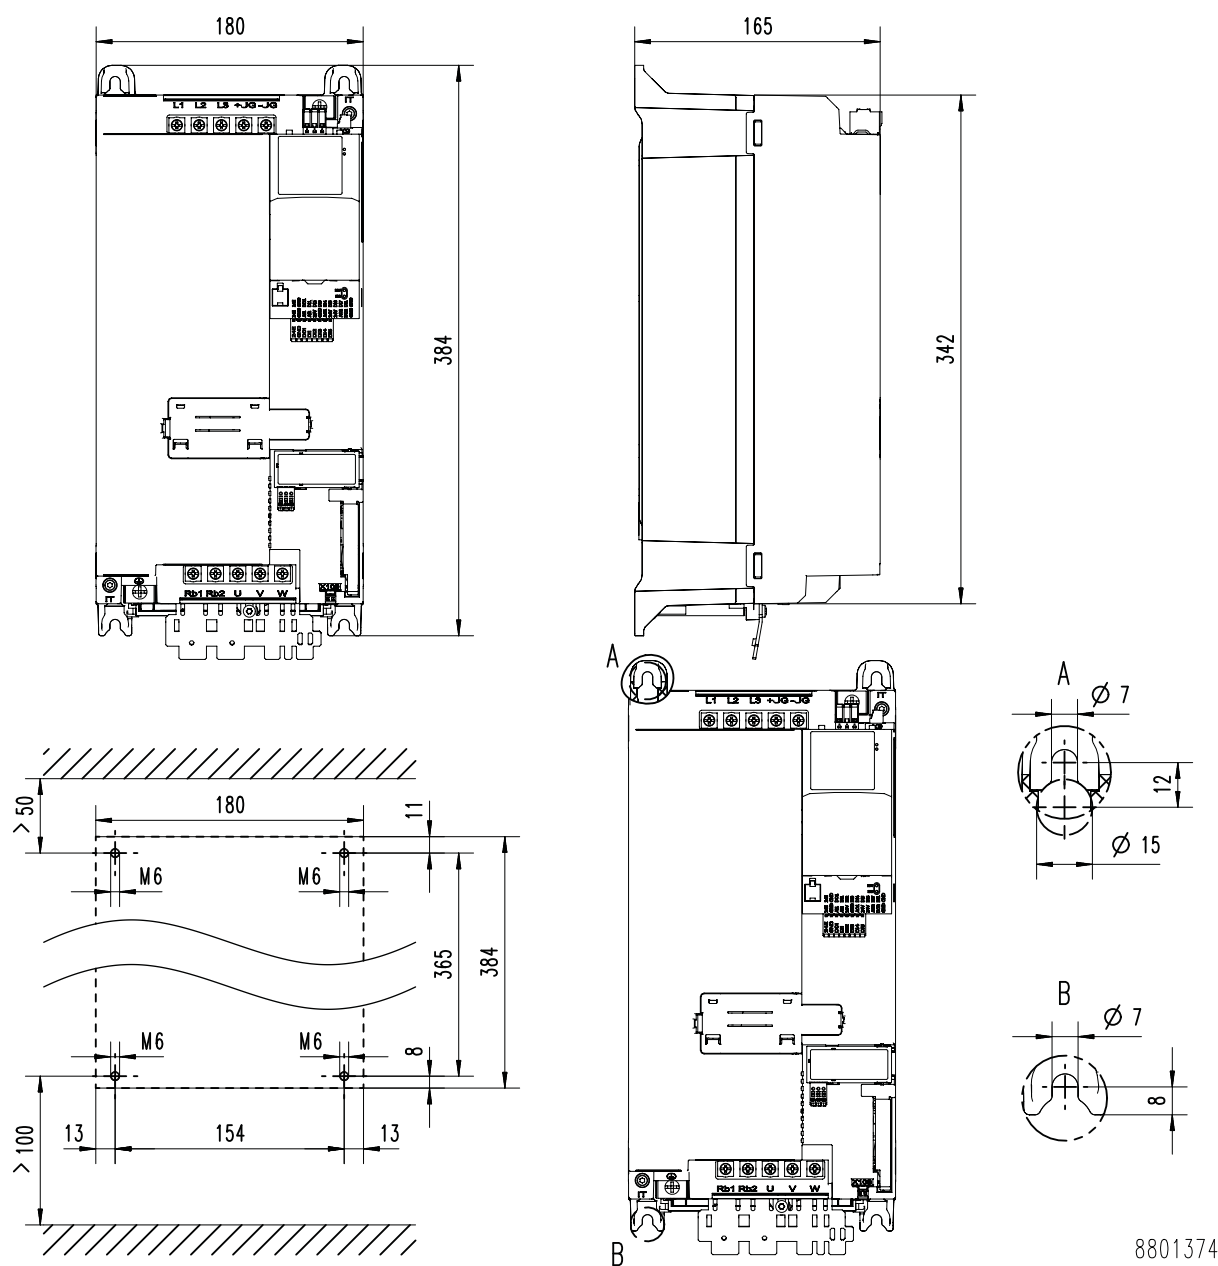


8801374

20 hp ... 40 hp

The dimensions in inch apply to:

20 hp	I55BE315F
25 hp	I55BE318F
30 hp	I55BE322F
40 hp	I55BE330F
Weight	17.6 lb

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

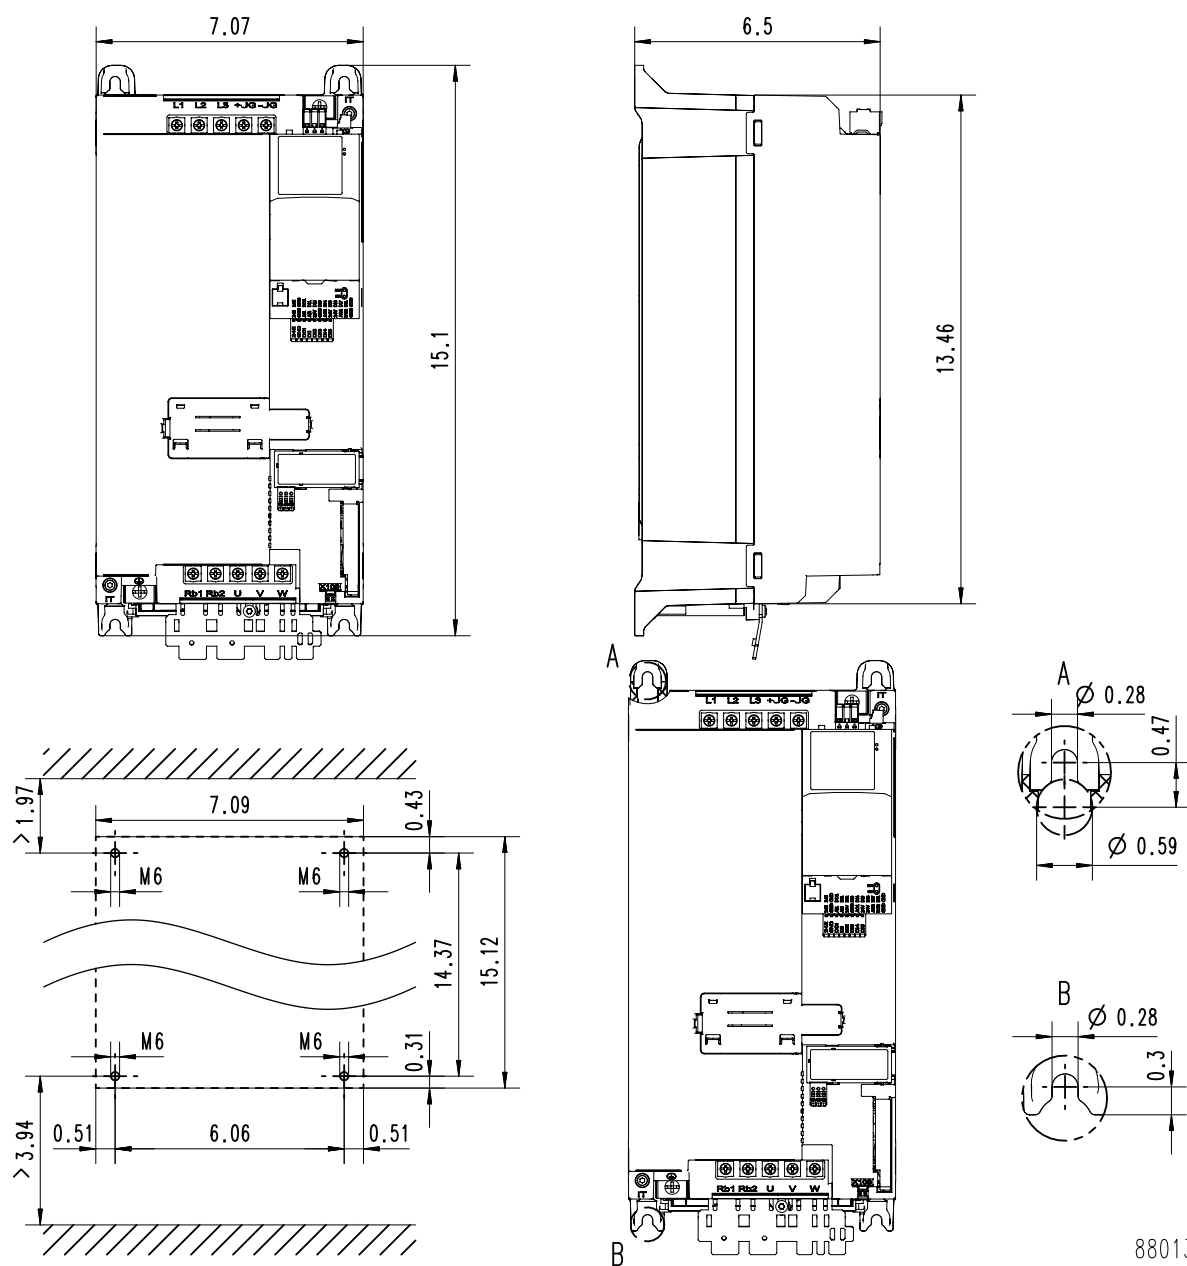

8801375