


przemiennik częstotliwości550

I55AE125B10V1000KS

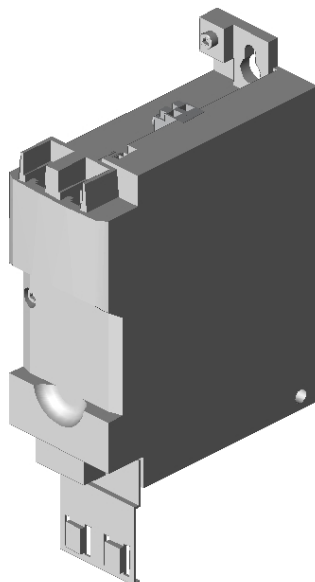

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16482619_3D.stp
16482619_datatable.csv
16482619_datatable.xls

Obsługa myszy w modelu 3D



Informacje techniczne o produkcie

przemiennik częstotliwości550

inwerter

typ

moc znamionowa
znamionowe nap. zasilania
prąd wyjściowy
filtr przeciwzakłóceńowy
częstotliwość wyjściowa
rozszerzenie I/O
sieciowa magistr. przemysłowa
stopień ochrony
Miejsce montażu
Waga / Jednostka

i550-C0.25/230-1

I55AE125B10V1000KS






0.25 kW/0.33 HP
1/N/PE 230/240 V AC
1.7 A
zintegrowane
0-599 Hz
standard I/O
EtherCAT
IP20
Szafa sterownicza
0.968 KG

0.25 kW ... 0.37 kW

The dimensions in mm apply to:

0.25 kW	I55AE125B	I55AE125D	
0.37 kW	I55AE137B	I55AE137D	I55AE137F
Weight	0.8 kg	0.8 kg	0.8 kg

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

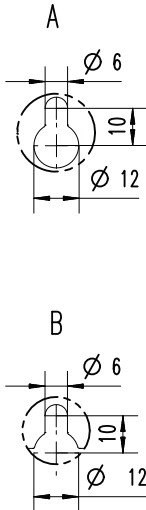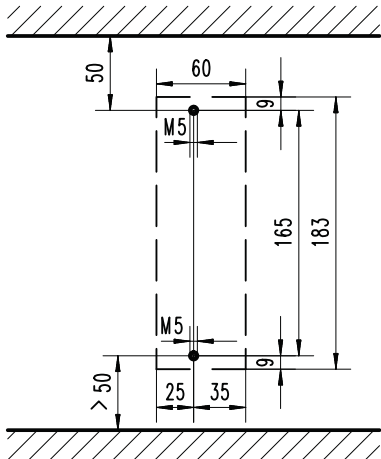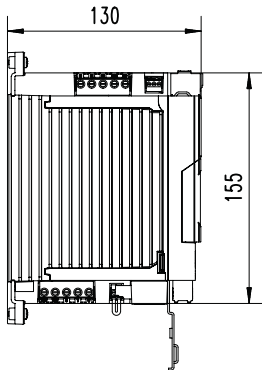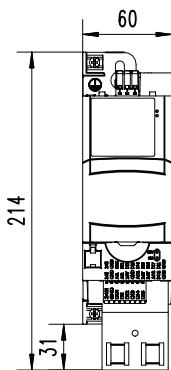


8800263

0.33 hp ... 0.5 hp

The dimensions in inch apply to:

0.33 hp	I55AE125B	I55AE125D	
0.5 hp	I55AE137B	I55AE137D	I55AE137F
Weight	1.8 lb	1.8 lb	1.8 lb

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

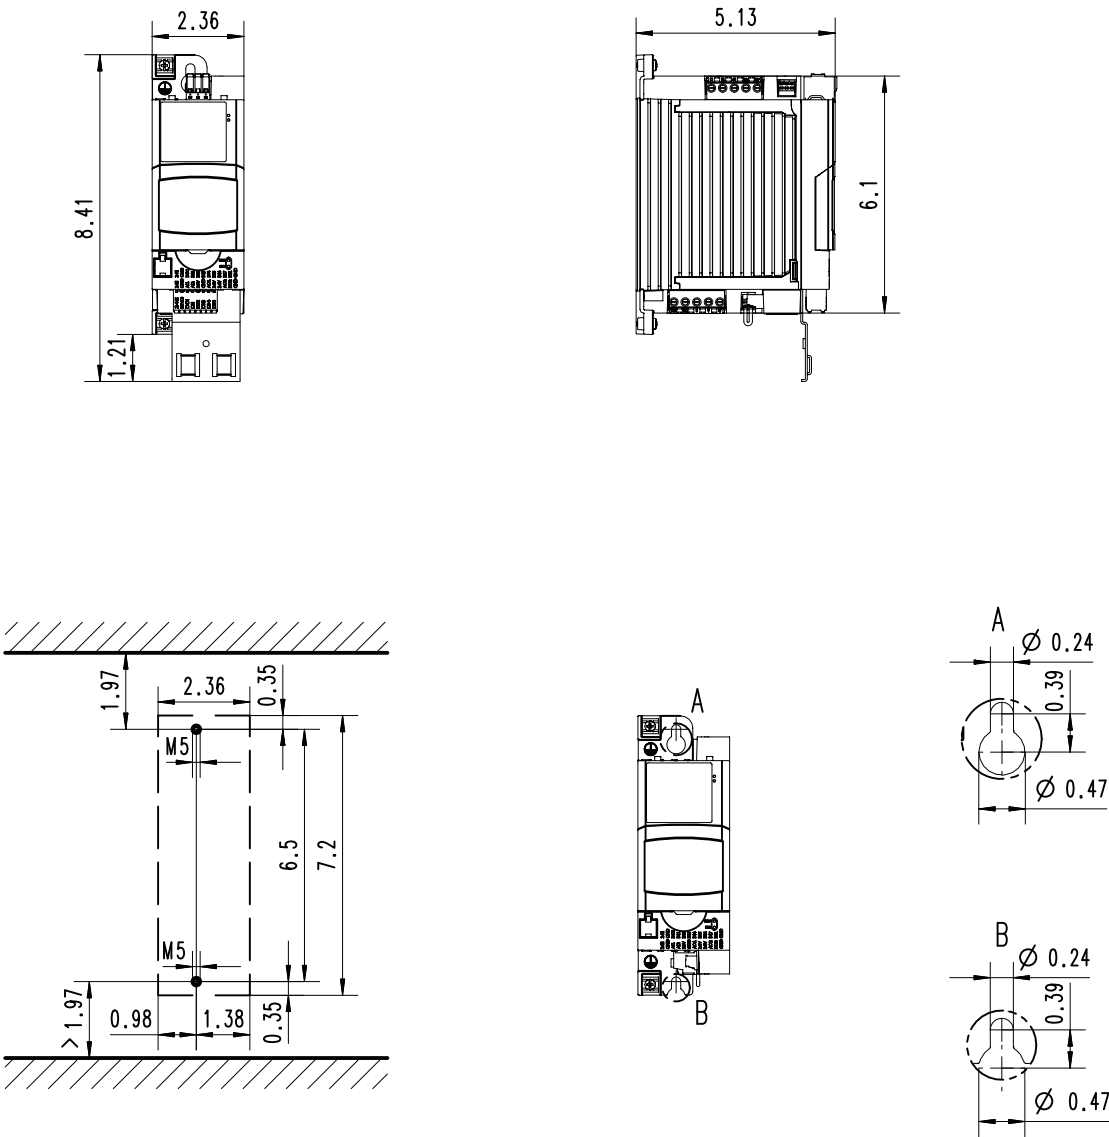

8800298