


przemiennik częstotliwości550

I55AE215B10V10016S

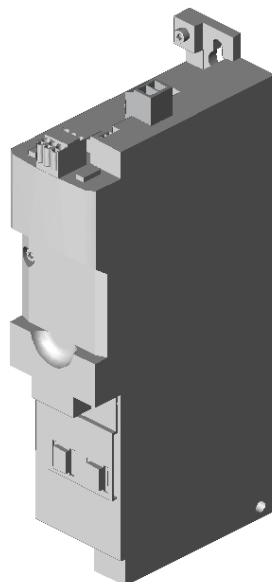

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16273696_3D.stp
16273696_datatable.csv
16273696_datatable.xls

Obsługa myszy w modelu 3D



Informacje techniczne o produkcie

przemiennik częstotliwości550

inwerter

typ

moc znamionowa
znamionowe nap. zasilania
prąd wyjściowy
filtr przeciwzakłóceńowy
częstotliwość wyjściowa
rozszerzenie I/O
sieciowa magistr. przemysłowa
stopień ochrony
Miejsce montażu
Waga / Jednostka

i550-C1.5/230-1

I55AE215B10V10016S




1.5 kW/2 HP
1/N/PE 230/240 V AC
7 A
zintegrowane
0-599 Hz
standard I/O
IO-Link
IP20
Szafa sterownicza
1.750 KG

0.75 kW ... 4 kW

The dimensions in mm apply to:

0.75 kW	I55AE175A				
1.1 kW	I55AE211A	I55AE211B	I55AE211D	I55AE211F	
1.5 kW		I55AE215B	I55AE215D	I55AE215F	
2.2 kW		I55AE222B	I55AE222D	I55AE222F	
3 kW					I55BE230F
4 kW					I55BE240F
Weight	1.35 kg	1.35 kg	1.35 kg	1.35 kg	1.35 kg

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

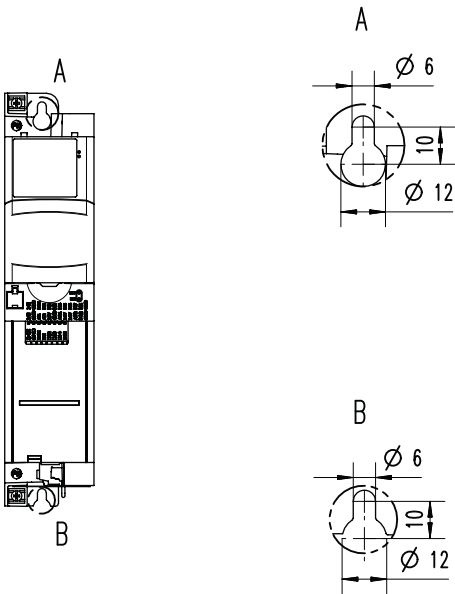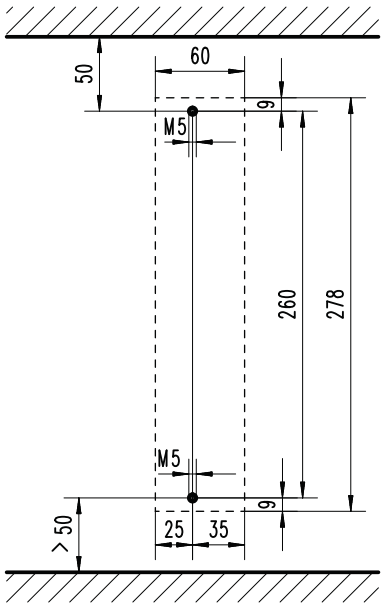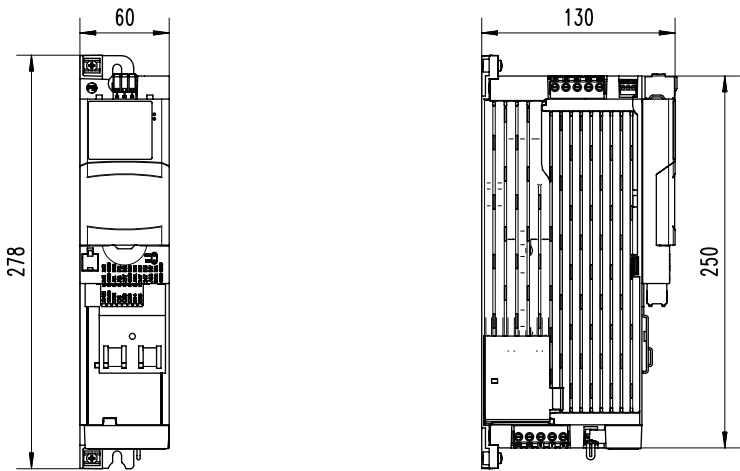


8800265

1 hp ... 5 hp

The dimensions in inch apply to:

1 hp	I55AE175A				
1.5 hp	I55AE211A	I55AE211B	I55AE211D	I55AE211F	
2 hp		I55AE215B	I55AE215D	I55AE215F	
3 hp		I55AE222B	I55AE222D	I55AE222F	
4 hp					I55BE230F
5 hp					I55BE240F
Weight	3 lb	3 lb	3 lb	3 lb	3 lb

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

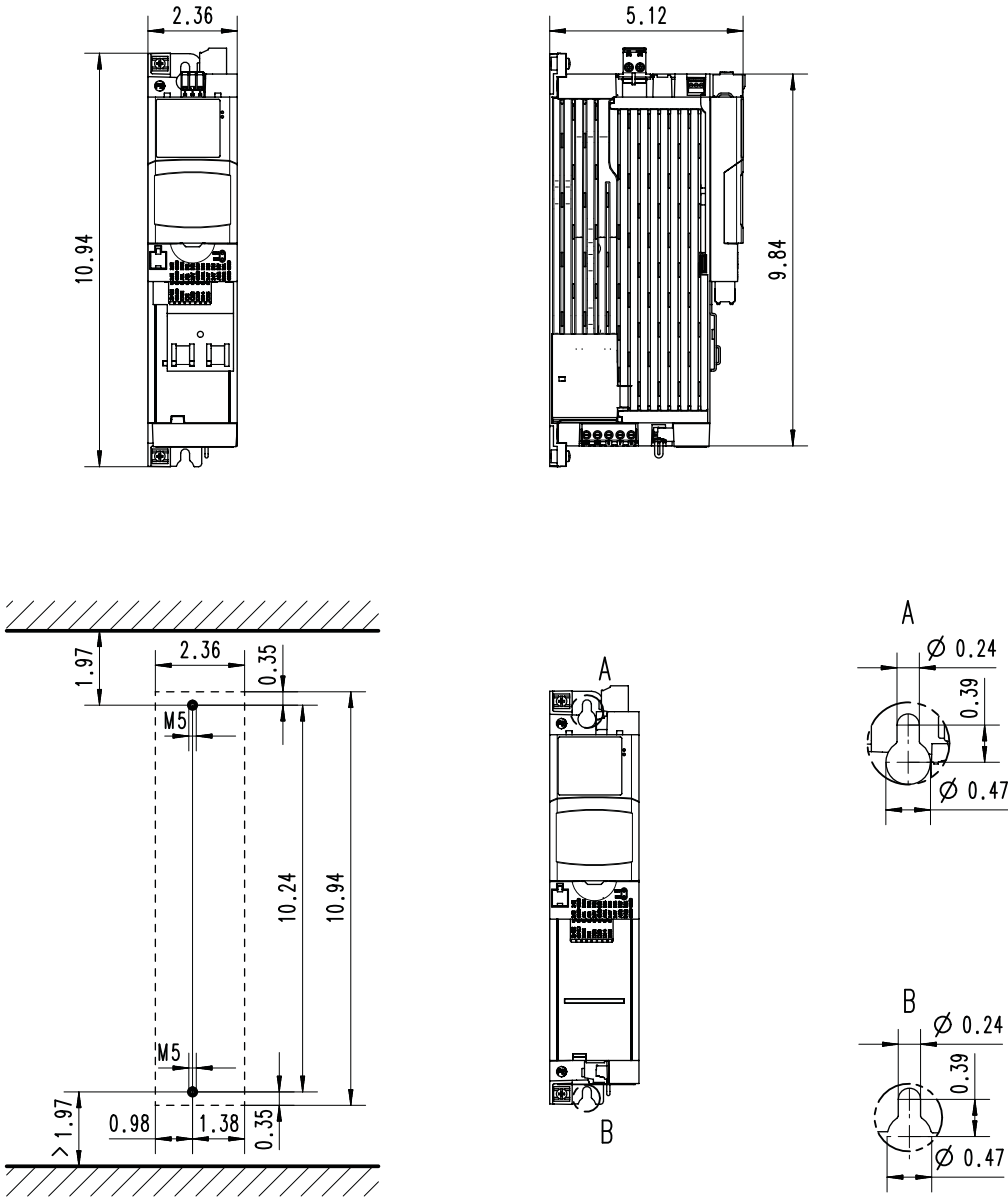

8800300