


## przemiennik częstotliwości550

## I55AE222B1AV1000KS

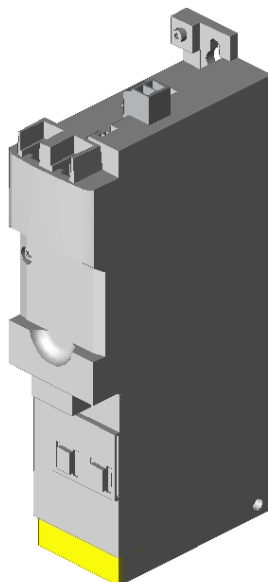

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.  
Mogą występować niewielkie różnice.

16483100\_3D.stp  
16483100\_datatable.csv  
16483100\_datatable.xls

Obsługa myszy w modelu 3D



## Informacje techniczne o produkcie

## przemiennik częstotliwości550

## inwerter

## typ

moc znamionowa  
znamionowe nap. zasilania  
prąd wyjściowy  
filtr przeciwzakłóceńowy  
częstotliwość wyjściowa  
rozszerzenie I/O  
sieciowa magistr. przemysłowa  
Bezpieczeństwo funkcjonalne  
stopień ochrony  
Miejsce montażu  
Waga / Jednostka

## i550-C2.2/230-1

## I55AE222B1AV1000KS




2.2 kW/3 HP  
1/N/PE 230/240 V AC  
9.6 A  
zintegrowane  
0-599 Hz  
standard I/O  
EtherCAT  
Basic Safety – STO  
IP20  
Szafa sterownicza  
1.600 KG

0.75 kW ... 4 kW

The dimensions in mm apply to:

|         |           |           |           |           |           |
|---------|-----------|-----------|-----------|-----------|-----------|
| 0.75 kW | I55AE175A |           |           |           |           |
| 1.1 kW  | I55AE211A | I55AE211B | I55AE211D | I55AE211F |           |
| 1.5 kW  |           | I55AE215B | I55AE215D | I55AE215F |           |
| 2.2 kW  |           | I55AE222B | I55AE222D | I55AE222F |           |
| 3 kW    |           |           |           |           | I55BE230F |
| 4 kW    |           |           |           |           | I55BE240F |
| Weight  | 1.35 kg   | 1.35 kg   | 1.35 kg   | 1.35 kg   | 1.35 kg   |

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

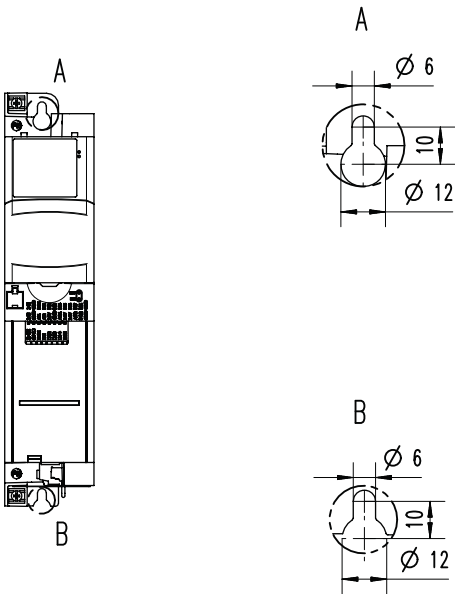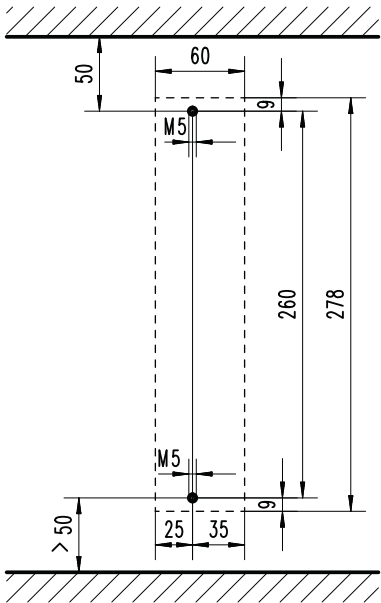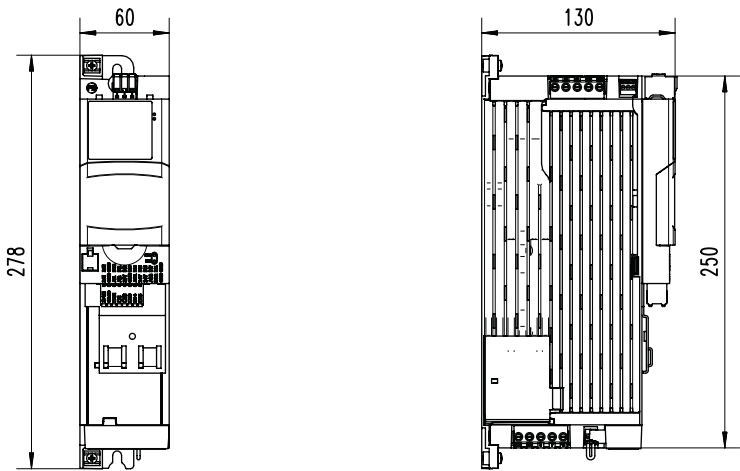


8800265

1 hp ... 5 hp

The dimensions in inch apply to:

|        |           |           |           |           |           |
|--------|-----------|-----------|-----------|-----------|-----------|
| 1 hp   | I55AE175A |           |           |           |           |
| 1.5 hp | I55AE211A | I55AE211B | I55AE211D | I55AE211F |           |
| 2 hp   |           | I55AE215B | I55AE215D | I55AE215F |           |
| 3 hp   |           | I55AE222B | I55AE222D | I55AE222F |           |
| 4 hp   |           |           |           |           | I55BE230F |
| 5 hp   |           |           |           |           | I55BE240F |
| Weight | 3 lb      | 3 lb      | 3 lb      | 3 lb      | 3 lb      |

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

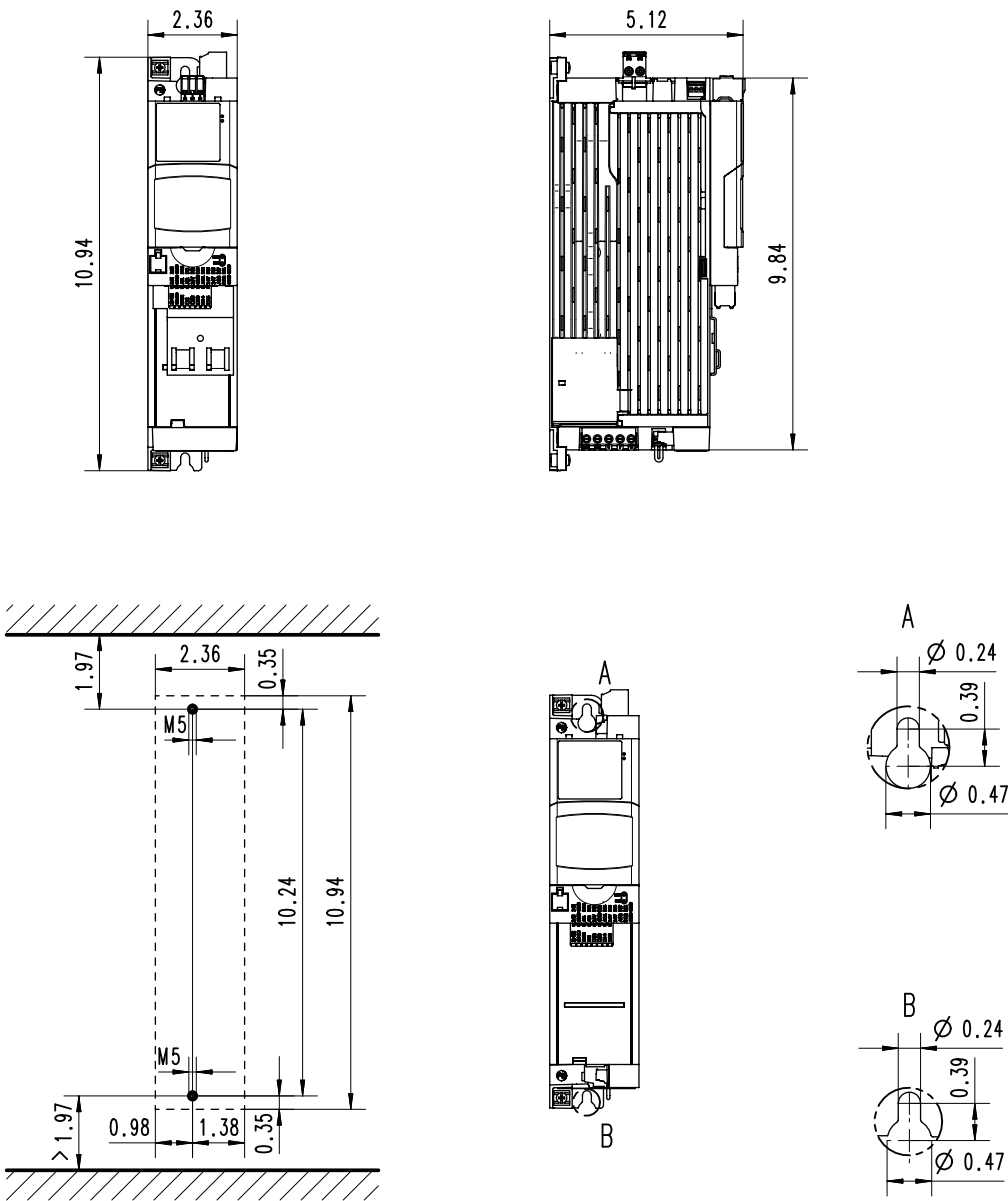

8800300