
przemiennik częstotliwościi550

I55AE222F10V10001S

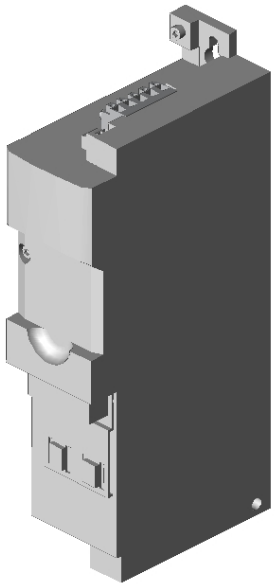

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16065212_3D.stp
16065212_datatable.csv
16065212_datatable.xls

Obsługa myszy w modelu 3D

Obrót | Zmiana wielkości | Przesunięcie



Informacje techniczne o produkcie

przemiennik częstotliwościi550


inwerter	**i550-C2.2/400-3**
typ	**I55AE222F10V10001S**
moc znamionowa	2.2 kW/3 HP
znamionowe nap. zasilania	3/PE 400/480 V AC
prąd wyjściowy	5.6/4.8 A
filtr przeciwzakłóceniowy	zintegrowane
częstotliwość wyjściowa	0-599 Hz
rozszerzenie I/O	aplikacja I/O
stopień ochrony	IP20
Miejsce montażu	Szafa sterownicza
Waga / Jednostka	1.560 KG


0.75 kW ... 4 kW


The dimensions in mm apply to:


0.75 kW	I55AE175A				
1.1 kW	I55AE211A	I55AE211B	I55AE211D	I55AE211F	
1.5 kW		I55AE215B	I55AE215D	I55AE215F	
2.2 kW		I55AE222B	I55AE222D	I55AE222F	
3 kW					I55BE230F
4 kW					I55BE240F
Weight	1.35 kg	1.35 kg	1.35 kg	1.35 kg	1.35 kg


Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

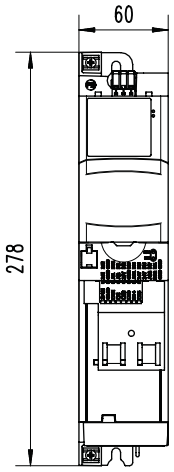


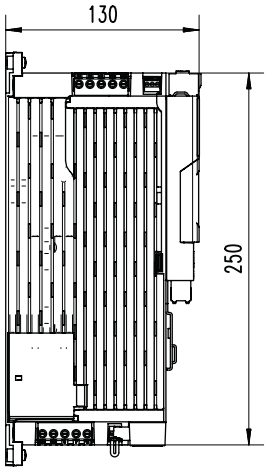

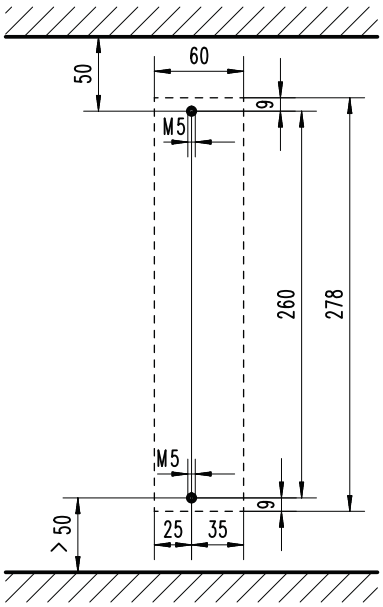








8800265


1 hp ... 5 hp


The dimensions in inch apply to:


1 hp	I55AE175A				
1.5 hp	I55AE211A	I55AE211B	I55AE211D	I55AE211F	
2 hp		I55AE215B	I55AE215D	I55AE215F	
3 hp		I55AE222B	I55AE222D	I55AE222F	
4 hp					I55BE230F
5 hp					I55BE240F
Weight	3 lb	3 lb	3 lb	3 lb	3 lb


Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

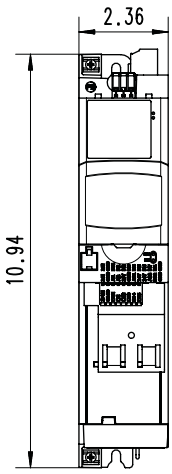


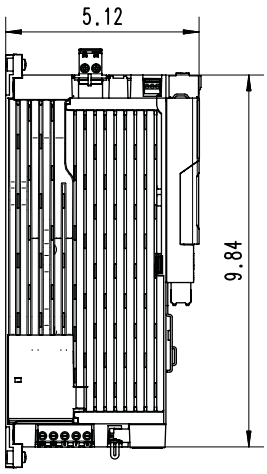

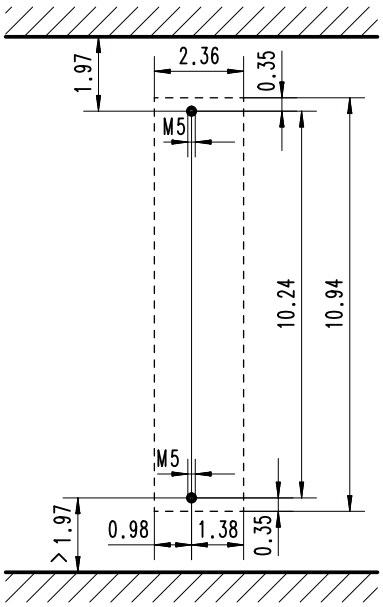







8800300