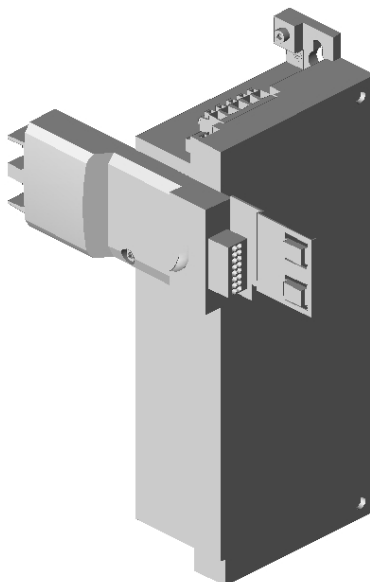


seria prod. przem. częstotl.

I55BE240F10V1007LS

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16783683_3D.stp
16783683_datatable.csv
16783683_datatable.xls

Obsługa myszy w modelu 3D

**Informacje techniczne o produkcie**

seria prod. przem. częstotl.
inwerter
typ
moc znamionowa
moc znamionowa LD
znamionowe nap. zasilania
prąd wyjściowy
prąd wyjściowy LD
filtr przeciwzakłóceńowy
częstotliwość wyjściowa
rozszerzenie I/O
sieciowa magistr. przemysłowa
stopień ochrony
Miejsce montażu
Waga / Jednostka




przemiennik częstotliwości550
i550-C4/400-3
I55BE240F10V1007LS
4 kW/5 HP
5.5 kW/7.5 HP
3/PE 400/480 V AC
9.5/8.2 A
11.9/9.8 A
zintegrowane
0-599 Hz
standard I/O
PROFINET
IP20
Szafa sterownicza
1.660 KG

0.75 kW ... 4 kW

The dimensions in mm apply to:

0.75 kW	I55AE175A				
1.1 kW	I55AE211A	I55AE211B	I55AE211D	I55AE211F	
1.5 kW		I55AE215B	I55AE215D	I55AE215F	
2.2 kW		I55AE222B	I55AE222D	I55AE222F	
3 kW					I55BE230F
4 kW					I55BE240F
Weight	1.35 kg	1.35 kg	1.35 kg	1.35 kg	1.35 kg

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

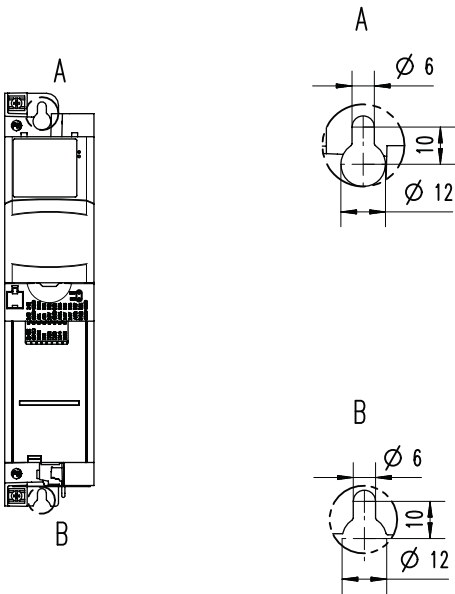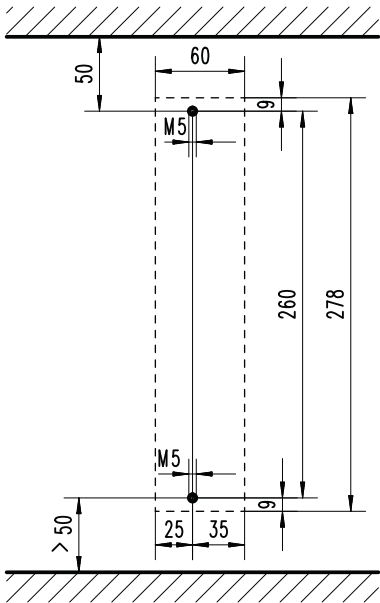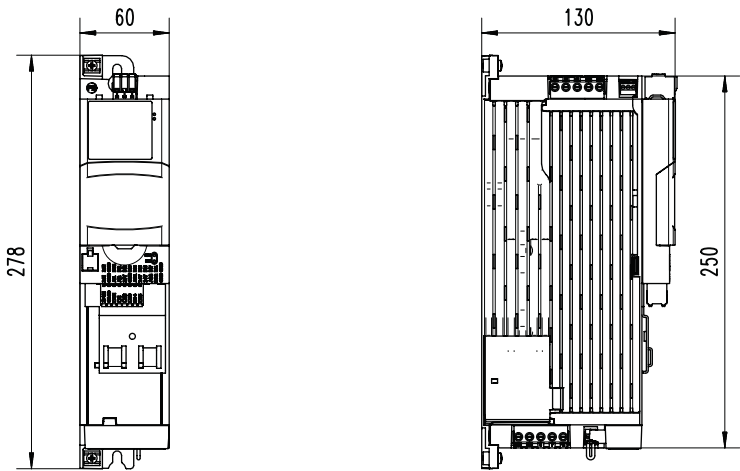


8800265

1 hp ... 5 hp

The dimensions in inch apply to:

1 hp	I55AE175A				
1.5 hp	I55AE211A	I55AE211B	I55AE211D	I55AE211F	
2 hp		I55AE215B	I55AE215D	I55AE215F	
3 hp		I55AE222B	I55AE222D	I55AE222F	
4 hp					I55BE230F
5 hp					I55BE240F
Weight	3 lb	3 lb	3 lb	3 lb	3 lb

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

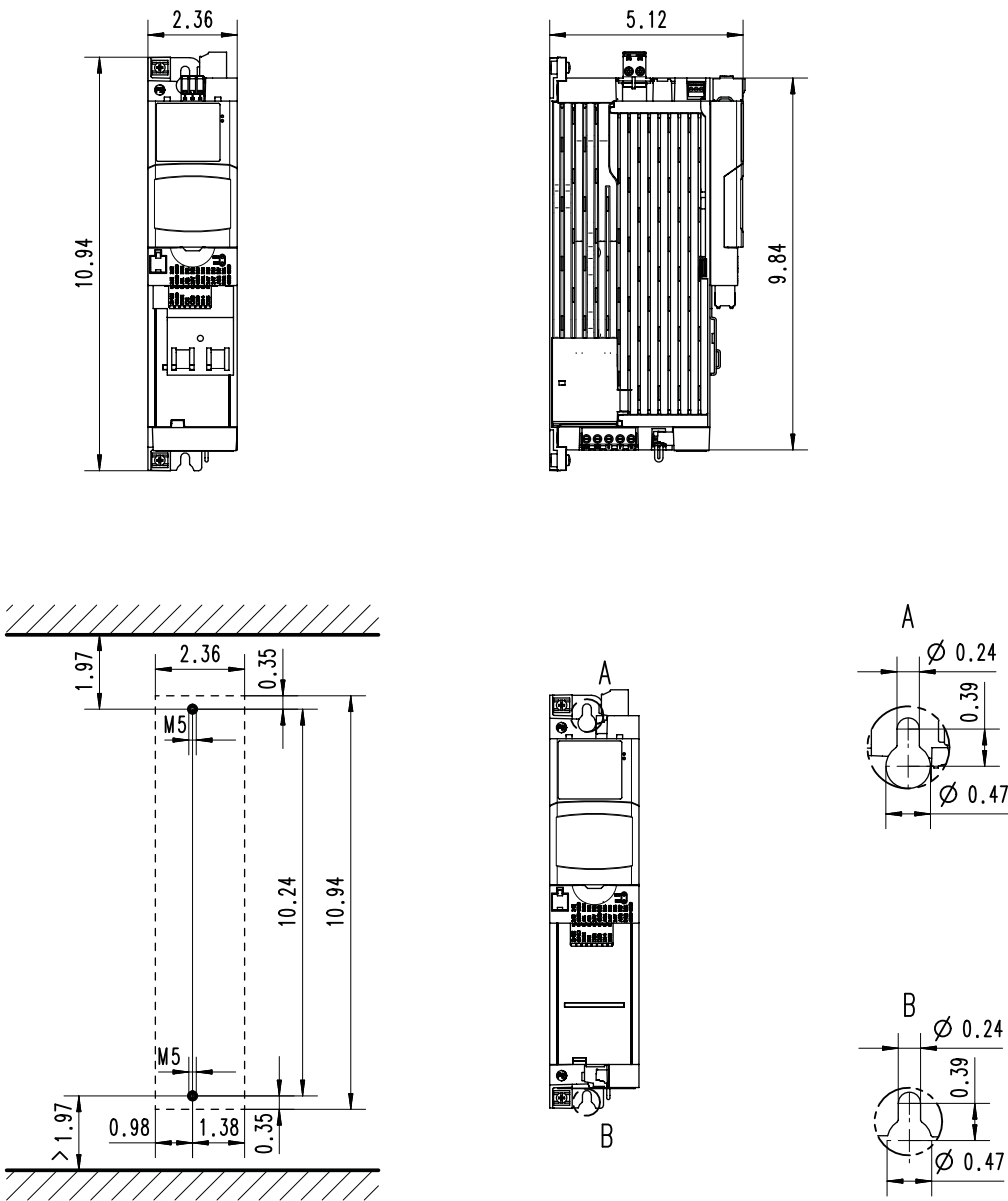

8800300