
przemiennik częstotliwościi550

I55AE255F1AV10003S

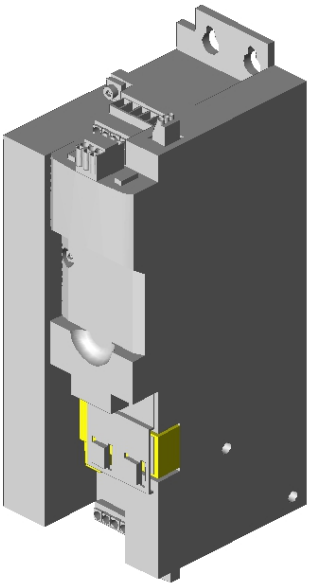

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16070392_3D.stp
16070392_datatable.csv
16070392_datatable.xls

Obsługa myszy w modelu 3D

Obrót | Zmiana wielkości | Przesunięcie



Informacje techniczne o produkcie

przemiennik częstotliwościi550


inwerter	**i550-C5.5/400-3**
typ	**I55AE255F1AV10003S**
moc znamionowa	5.5 kW/7.5 HP
moc znamionowa LD	7.5 kW/10 HP
znamionowe nap. zasilania	3/PE 400/480 V AC
prąd wyjściowy	13/11 A
prąd wyjściowy LD	15.6/13.2 A
filtr przeciwzakłóceniowy	zintegrowane
częstotliwość wyjściowa	0-599 Hz
rozszerzenie I/O	standard I/O
sieciowa magistr. przemysłowa	Modbus RTU
Bezpieczeństwo funkcjonalne	Basic Safety – STO
stopień ochrony	IP20
Miejsce montażu	Szafa sterownicza
Waga / Jednostka	2.510 KG

3 kW ... 5.5 kW

The dimensions in mm apply to:

3 kW		I55AE230F
4 kW	I55AE240C	I55AE240F
5.5 kW	I55AE255C	I55AE255F
Weight	2.1 kg	2.3 kg

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

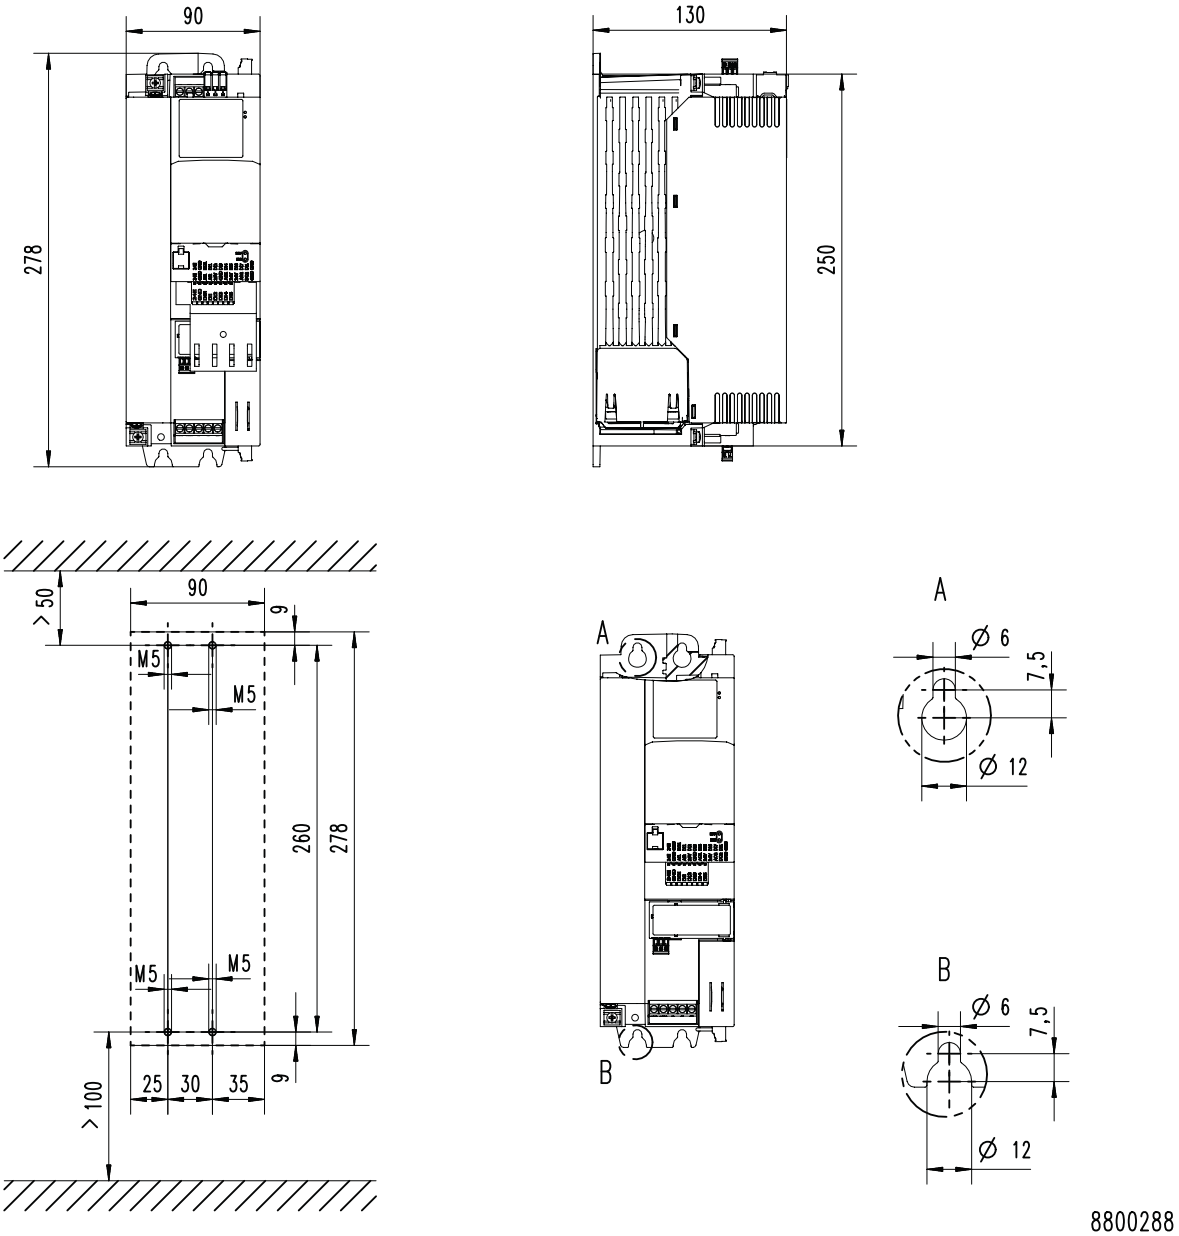

4 hp ... 7.5 hp

The dimensions in inch apply to:

4 hp		I55AE230F
5 hp	I55AE240C	I55AE240F
7.5 hp	I55AE255C	I55AE255F
Weight	4.6 lb	5 lb

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

