
seria prod. przem. częstotl.

I55BE275F1AV10000S

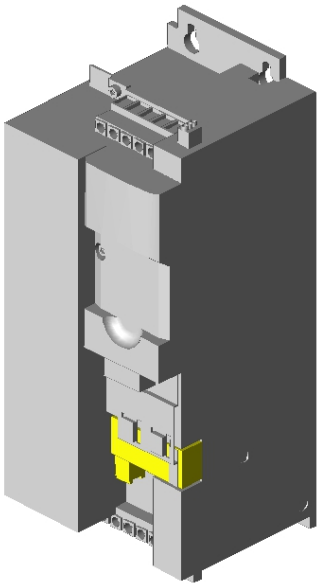

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16510947_3D.stp

16510947_datatable.csv

16510947_datatable.xls

Obsługa myszy w modelu 3D

Obrót | Zmiana wielkości | Przesunięcie



Informacje techniczne o produkcie


seria prod. przem. częstotl.	przemiennik częstotliwościi550
inwerter	i550-C7.5/400-3
typ	I55BE275F1AV10000S
moc znamionowa	7.5 kW/10 HP
moc znamionowa LD	11 kW/15 HP
znamionowe nap. zasilania	3/PE 400/480 V AC
prąd wyjściowy	16.5/14 A
prąd wyjściowy LD	23/18.3 A
filtr przeciwzakłóceniowy	zintegrowane
częstotliwość wyjściowa	0-599 Hz
rozszerzenie I/O	standard I/O
Bezpieczeństwo funkcjonalne	Basic Safety – STO
stopień ochrony	IP20
Miejsce montażu	Szafa sterownicza
Waga / Jednostka	3.840 KG

7.5 kW ... 11 kW

The dimensions in mm apply to:

7.5 kW	I55AE275F	I55BE275F
11 kW	I55AE311F	I55BE311F
Weight	3.7 kg	3.7 kg

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

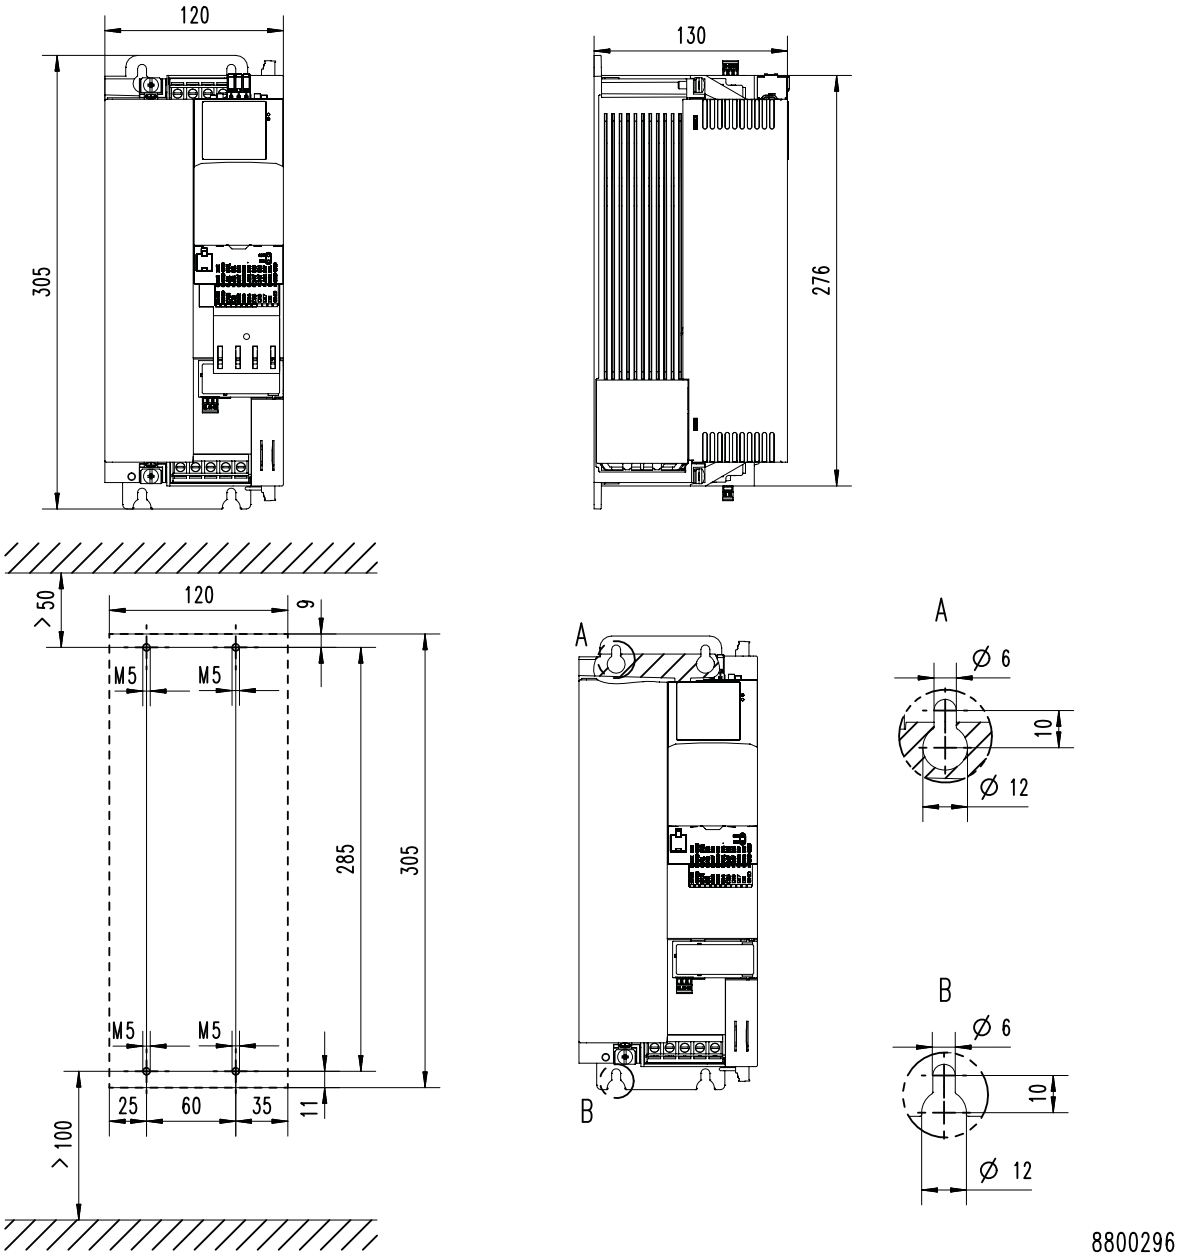

10 hp ... 15 hp

The dimensions in inch apply to:

10 hp	I55AE275F	I55BE275F
15 hp	I55AE311F	I55BE311F
Weight	8 lb	8 lb

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

