
# przemiennik częstotliwościi550

# I55AE337F10V1007MS

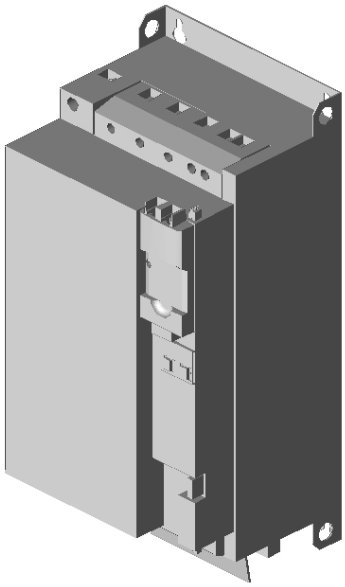

Uwaga: Pokazany model jest przedstawiony w uproszczony sposób.
Mogą występować niewielkie różnice.

16783597_3D.stp

16783597_datatable.csv

16783597_datatable.xls

Obsługa myszy w modelu 3D

Obrót | Zmiana wielkości | Przesunięcie



## Informacje techniczne o produkcie

**przemiennik częstotliwościi550**


| | |
|---|---|
| **inwerter** | **i550-C37/400-3** |
| **typ** | **I55AE337F10V1007MS** |
| moc znamionowa | 37 kW/50 HP |
| moc znamionowa LD | 45 kW/60 HP |
| znamionowe nap. zasilania | 3/PE 400/480 V AC |
| prąd wyjściowy | 76/65 A |
| prąd wyjściowy LD | 91.2/78 A |
| filtr przeciwzakłóceniowy | zintegrowane |
| częstotliwość wyjściowa | 0-599 Hz |
| rozszerzenie I/O | standard I/O |
| sieciowa magistr. przemysłowa | EtherNet/IP |
| stopień ochrony | IP20 |
| Miejsce montażu | Szafa sterownicza |
| Waga / Jednostka | 16.300 KG |

**37 kW ... 45 kW**

The dimensions in mm apply to:

| | |
|---|---|
| 37 kW | I55AE337F |
| 45 kW | I55AE345F |
| Weight | 17.2 kg |

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

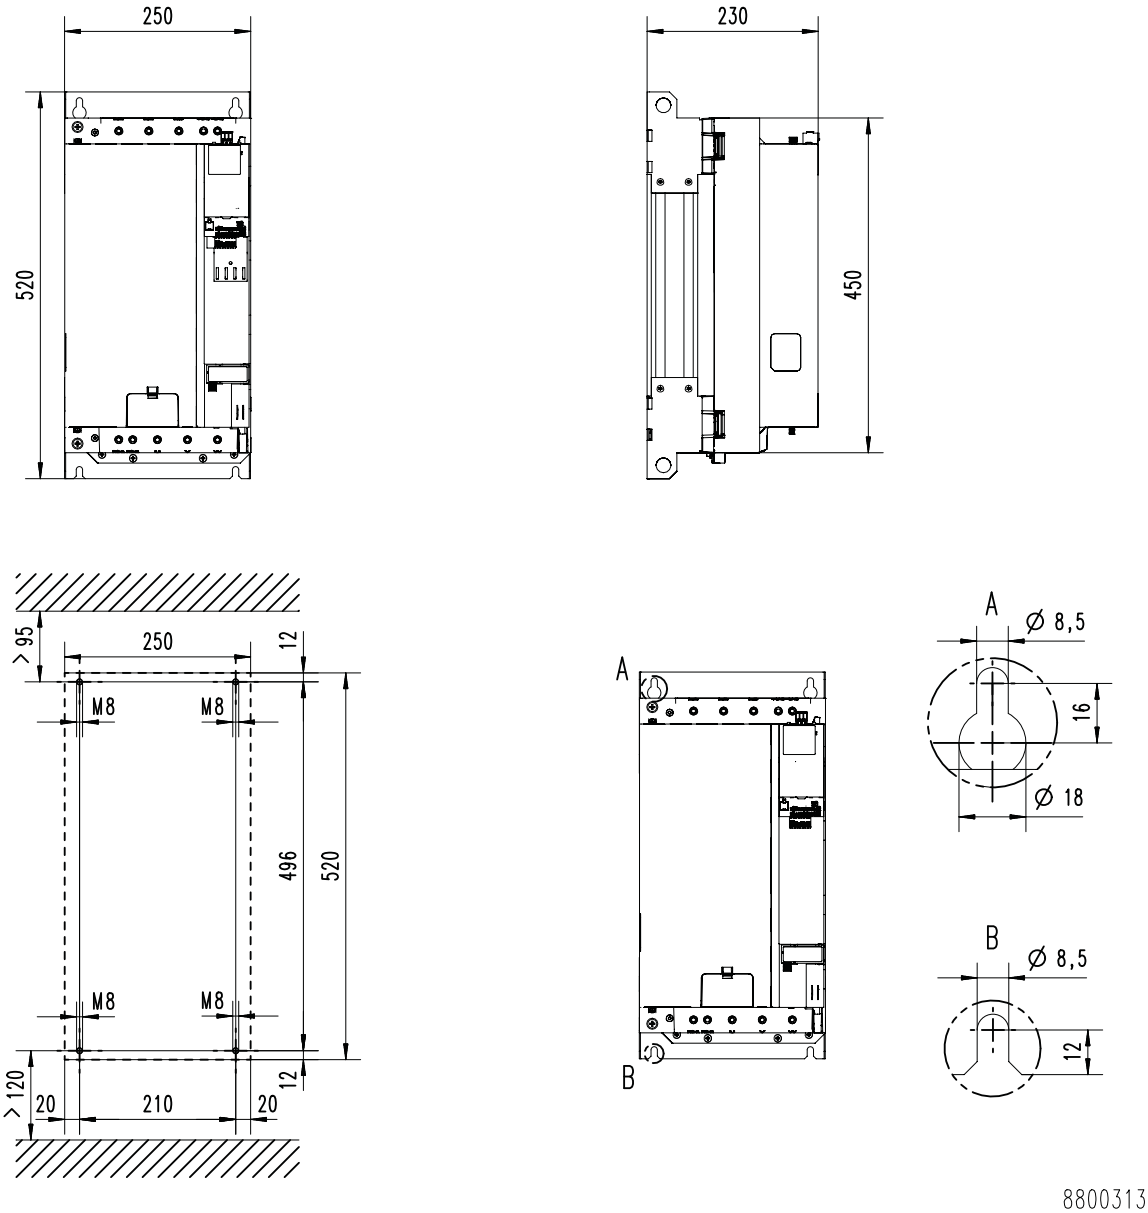

**50 hp ... 60 hp**

The dimensions in inch apply to:

| | |
|---|---|
| 50 hp | I55AE337F |
| 60 hp | I55AE345F |
| Weight | 38 lb |

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

