



Sparrow NW20

Intelligent 4G LTE VPN Router, Industrial Design,
Dual SIM Failover, RS232 and RS485 Serial connection

Elmatic NW20 industrial cellular VPN router enables wireless data connectivity over public and private LTE cellular networks at 4G speeds.

Router NW20 has dual SIM backup, 2 Ethernet ports, RS232 and RS485 interfaces are provided to support Serial to IP communication. NW20 router supports 9 to 36 VDC wide range power inputs, designed with reverse-voltage protection mechanism for greater reliability. It is an advanced choice for universal wireless M2M applications with reliable features for data transmission.

TYPICAL APPLICATION



Secure and reliable internet access

- Wireless Mobile Broadband 2G / 3G / 4G Connection
- Connection managers ensure seamless communication
- Support Multiple VPN tunnels for data encryption

Designed for industrial usage

- Power Input Range 9 to 36 VDC
- Industrial design for harsh environment
- Aluminum casing and din-rail installation

Easy to use and easy maintenance


- User friendly web interface for user interaction
- Support Central Management Platform
- Reduce high costs for onsite maintenance

SPECIFICATIONS

CELLULAR	
Frequency Bands	LTE FDD: B1/B2/B3/B4/B5/B7/B8/B20/B28/B28A LTE TDD: B40 WCDMA: B1/B2/B5/B8 GSM: B2/B3/B5/B8
SIM	2 x SIM slots, 1.8V / 3V
SIM Failover	Auto-switch cases: data limited, no network, network denied, data connection fail
Antennas	2 (MAIN + AUX), SMA female
ETHERNET	
Number of Ports	1 x WAN, 1 x LAN or 2 x LAN, Auto 10/100 Mbps
Magnet Isolation Protection	1.5 kV
Wi-Fi	
Wireless Mode	IEEE 802.11b/g/n, Access Point (AP), Client
Wireless Speed	150 Mbps
Wireless Security	WPA, WPA2, WEP, CCMP, TKIP
Frequency Bands	2.412 - 2.484 GHz (2.4 GHz ISM band)
Antenas	1 x RP-SMA for Wi-Fi antenna connectors
SERIAL	
Number of Ports	1 x RS-232 (3 PIN) + 1 x RS-485
Connector	Terminal block
ESD Protection	± 15 KV
Baud Rate	300bps to 115200bps
POWER	
Connector	2-pin 3.5 mm female socket
Input Voltage Range	9 to 36 VDC
Power Consumption	Idle: 100 mA@12 V Data link: 400 mA (peak) @12 V
HARDWARE	
Watchdog	Built-in watchdog
LEDs	SYS, NET, USR, RSSI x 3
Reset Button	Reset/restore to factory default button
Ingress Protection	IP30
Housing & Weight	Aluminum, 220 g
Dimensions	103.8 mm x 82.8 mm x 28.8 mm
Installations	DIN-rail mounting
Operating Temperature	-40°C to 75°C
Operating Humidity	5% to 95% non-condensing
NETWORK	
Routing	Static routing
Network Protocols	TCP, UDP, IPv4, ICMP, NTP, DNS, HTTP, HTTPS, ARP, PPP, DHCP, IP Passthrough
Connection Manager	Ping Detection, Timer Reboot, ICMP for link detection
Firewall	Flexible access control of TCP, UDP, ICMP packets, MAC address filter
DDNS	Supported some service providers, others can be configured manually
SMS	SMS Configuration
VPN	
OpenVPN	OpenVPN server/client mode, client mode supports up to 5 x OpenVPN tunnels.
GRE	Layer2 and Layer3, supports up to 5 x GRE VPN tunnels
MONITORING & MANAGEMENT	
Web GUI	HTTP/HTTPS, firmware upgrade
Command Line Interface	SSHv2 and TELNET
Management platform	Central Management Platform

APP CENTER		
Apps	VPN: IPsec, L2TP, PPTP, DMVPN Network: Dynamic Routing (RIPv1/v2, OSPF, BGP), VRRP, Email Notification, SMS Gateway SMS Notification, Enforce Modem PPP Management: AT over IP, AT over COM, AT over Telnet, SNMPv1/v2/v3/, TR069, DMPC Protocol Converter: Modbus Master, Modbus Slave, Modbus ID Mapping, Modbus Gateway IEC101-104, DLMS to IEC104, Modbus to DNP3 More Apps Demands please contact with us	
APPROVAL		
EMI	EN 55032:2012 Class B	
EMS	IEC 61000-4-2 ESD	Level 4
	IEC 61000-4-3 RS	Level 3
	IEC 61000-4-4 EFT	Level 3
	IEC 61000-4-5 Surge	Level 3
	IEC 61000-4-6 CS	Level 3
	IEC 61000-4-12	Level 3
Vibration	EN50155	

DIMENSIONS

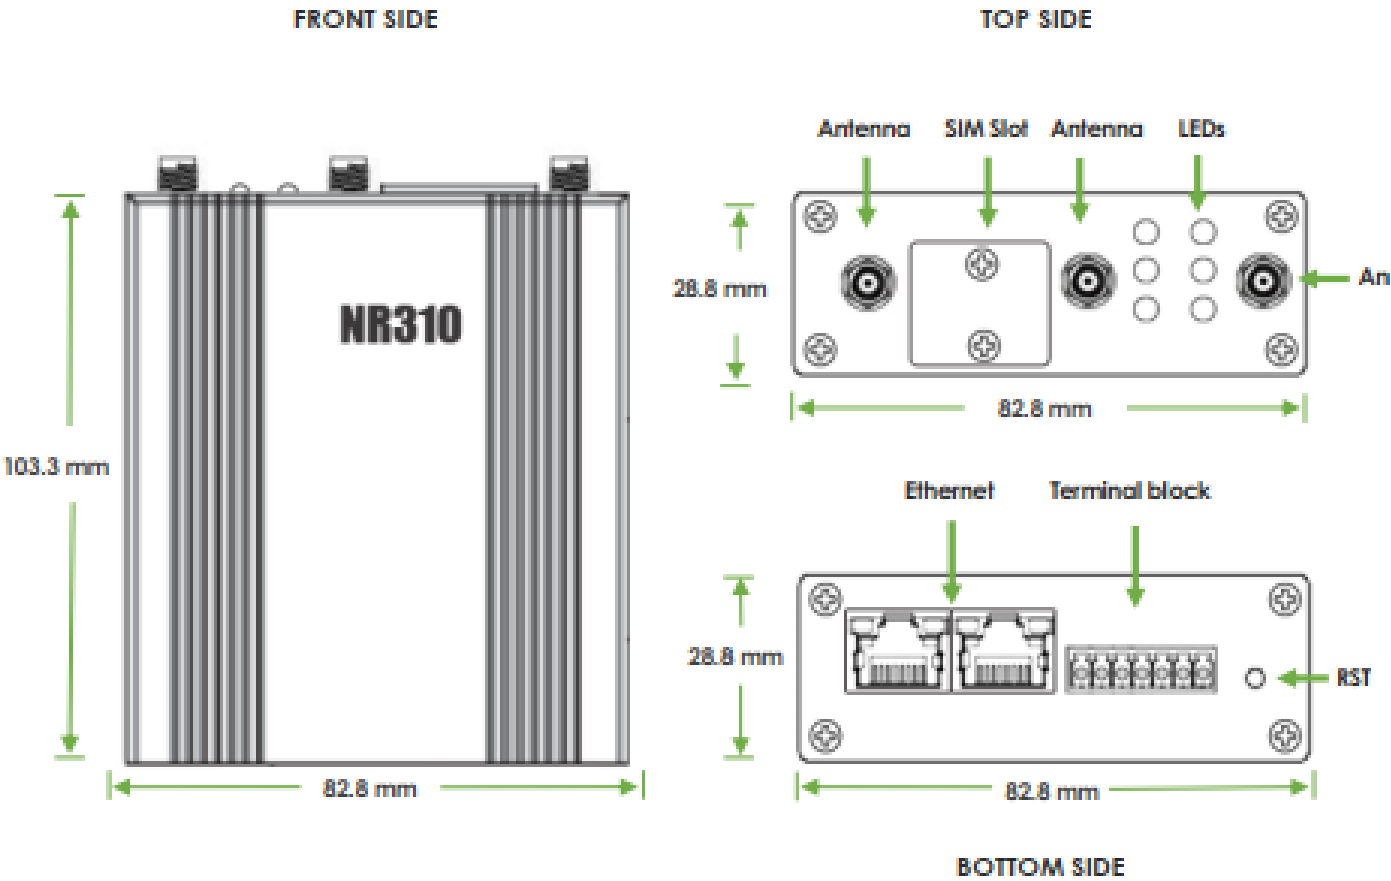

ORDERING INFORMATION

MODEL	PART NUMBER	DESCRIPTION
 <p>NW20</p>	A312430	4G LTE, 2x SIM, 2 x Eth, 1 x RS232 (3 PIN), 1 x RS485, 9 - 36VDC 2.5GHz Wi-Fi
OPTIONAL ACCESSORIES		
 <p>Power Supply</p>	F001009	Power Supply Adapter, EU Plug, Input 100 to 240VAC, Output 12V DC 1.5A
 <p>LTE Rubber Antenna</p>	F001006	4G / 3G / 2G Rubber Antenna, 698-960 / 1710-2170 / 2500-2700 MHz, 2dbi, Ø8×108mm, AC
 <p>Wi-Fi Rubber Antenna</p>	F001004	Wi-Fi Rubber Antenna, 2.4G-2.483G, 5dbi, Ø 13×197mm, AC
 <p>DIN-Rail</p>	F004001	Din Rail Kit, 35 mm, Aluminum with Black Spray Surface, 50 * 40 * 8.5 mm, 3 * M3.5 Screw Holes

Elmark Automatyka S.A.

ADRES: ul. Niemcewicza 76 05-075 Warszawa

TEL: 22 541 84 60
EMAIL: elmark@elmark.com.pl
WEB: www.elmark.com.pl

