ACP-4000

Quiet 4U Rackmount Chassis with Visual & Audible Alarm Notification



Features

- Supports either an ATX motherboard or PICMG backplane with up to 15 slots
- Shock-resistant disk drive bay design holds up to three 5.25" and one 3.5" disk drives
- LED indicators and alarm notification for system fault detection
- Low noise system fans
- Built-in Intelligent System Module enables whole system fan control and remote manageability

Quiet Specifications

C € FCC


		External	
Drive Bay	3.5"	1	
Dilve Day	5.25"	3	
.	Fan	2 (12 cm / 85 CFM each)	
Cooling	Air Filter	Yes	
F - 11/0 1 1 1 (USB 2.0	2	
Front I/O Interface	PS/2	1	
	LED Indicators	Power, HDD, temperature, fan, and power voltage statu	S
Miscellaneous	Rear Panel	Backplane version: One 9-pin D-Sub opening Motherboard version: Five 9-pin D-Sub & one 25-pin	D-Sub openings
Intelligent System Module Remote Monitoring	CPU/System fan speed , CPU/System temperature , motherboard voltage (Only selected Advantech MBs/CPU cards with WISE-PaaS/RMM installed can fully enable these functions, check with Advantech local rep. for detailed information.)		
	,	Operating	Non-Operating
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-20 ~ 60 °C (-4 ~ 140 °F)
Environment	Humidity	10 ~ 85% @ 40 °C, non-condensing	10 ~ 95% @ 40 °C, non-condensing
	Vibration (5 ~ 500 Hz)	1 Grms	2 G
	Shock	10 G (with 11 ms duration, half sine wave)	
Dhysical Characteristics	Dimensions (W x H x D)	482 x 177 x 479 mm (19" x 7" x 18.9")	
Physical Characteristics	Weight	15.2 kg (33.5 lb)	

Front View





AD\ANTECH Industri

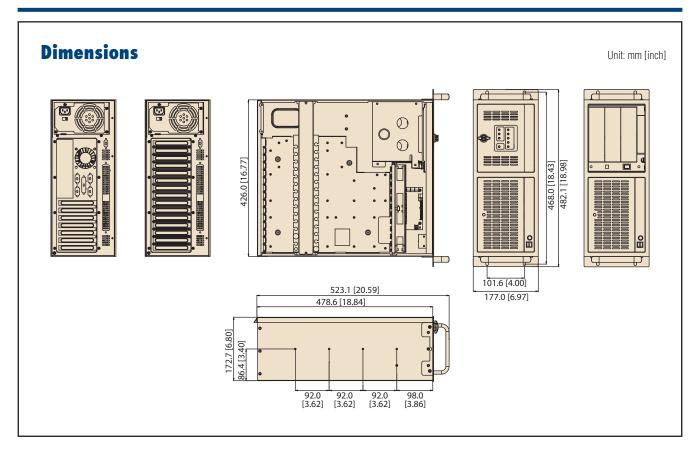

Ordering Information

	Part Number	Power Supply	Wattage	Switch type
	Backplane Version			
	ACP-4000BP-30CE	PS8-300ATX-ZBE	300W	ATX
	ACP-4000BP-40CE	PS8-400ATX-ZE	400W	ATX
	ACP-4000BP-50CE	PS8-500ATX-ZE	500W	ATX
Mother board Version				
	ACP-4000MB-30CE	PS8-300ATX-ZBE	300W	ATX
	ACP-4000MB-40CE	PS8-400ATX-ZE	400W	ATX
	ACP-4000MB-50CE	PS8-500ATX-ZE	500W	ATX
	ACP-4000MB-50RCE	RPS8-500ATX-XE	500W (1+1) redundant	ATX

Optional Accessories

Part Number	Description
1700006915	ATX 24P/20P + 4P + 8P 60cm cable (connecting from power supply to alarm board)
1700006917	Two Mini DIN (connect to MB) / 6P (connect to front I/O board) PS2 KB/Mouse cable
IPC-DT-5230E	Mobile rack for converting dual 5.25" drive bays to three 3.5" SATA HDD trays
1700029268-01	Power cable for GPU card (Two 4-pin 12V connectors to one 6+2 pins PCle power connector)
1700024754-01	Power cable for GPU card (Two B4P Molex connectors to one 6+2 pins PCle power connector)

 $^{^{\}star}$ If users use AIMB-763 or 3rd party motherboard, they need to purchase 1700006915 or 1700006916 for the front voltage LEDs to function normally. And they also need to purchase 1700006917 to make front PS/2 function normally.

Spare Parts

-				
Part Number	Description			
2130006147S000	Door filter 97.6 x 36.6 x 5 mm			
2130004803S000	Fan filter 115 x 195 x 5 mm			

^{*} If users use ASMB-822, they need to purchase 1700006915 for the front voltage LEDs to function normally.

^{*} If GPU card with 2 power connectors, please use 1700029268-01*1 + 1700024754-01*1;If GPU card with 1 power connector, please use 1700029268-01.

^{**}Only 500W or higher wattage PSU support 1700029268-01 and 1700024754-01 for high-end GPU card.