IPC-623

4U 20-Slot Rackmount Chassis



Features

- 4U rackmount chassis supports up 20 slot or 4-system backplane
- Support 500W or 1200W single power supply
- Two external 5.25" and one 3.5" shockproof drive bays
- Three 12 cm / 150 CFM cooling fans
- Dual top cover designed for easy maintenance
- Six easily replaceable air filters provide good airflow
- Built in Intelligent System module enabling whole system fan control and emote manageability

C € FCC


Specifications

-				
		External		
Drive Bay	3.5"	1		
	5.25"	2		
Cooling	Fan	3 (12 cm 150 CFM each)		
	Air Filter	4 (200 x 45 mm) + 2 (128 x 95 mm)		
Miscellaneous	LED Indicators	Power, HDD, fan, temperature, and power v	Power, HDD, fan, temperature, and power voltage status	
	Control		Power switch, system reset (reserve 3 more for quad-system) and alarm reset buttons	
Intelligent System Module	CPU/System fan speed, CPU/system temperature, motherboard voltage (Only selected Advantech MBs/CPU card with WISE-PaaS/RMM installed can fully enable these functions, check with Advantech local rep.			
Remote Monitoring	for detail information)	CPU card with WISE-PaaS/RIVIIVI Installed can fully er	nable these functions, check with Advantech local rep.	
Environment		Operating	Non-Operating	
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-20 ~ 60 °C (-4 ~ 140 °F)	
	Humidity	10 ~ 85% @ 40 °C, non-condensing	10 ~ 95% @ 40 °C, non-condensing	
	Vibration (5 ~ 500 Hz)	1 Grms	2 G	
	Shock	10G (with 11ms duration, 1/2 sine wave)		
Physical Characteristics	Dimensions (W x H x D)	482 x 177 x 657 mm (19" x 7" x 26")		
	Weight	27 4 kg (60 41 lb)		

Front View

One 3.5" and two 5.25" device space Alarm reset button Power button


Inside View




Rear View



Inside View



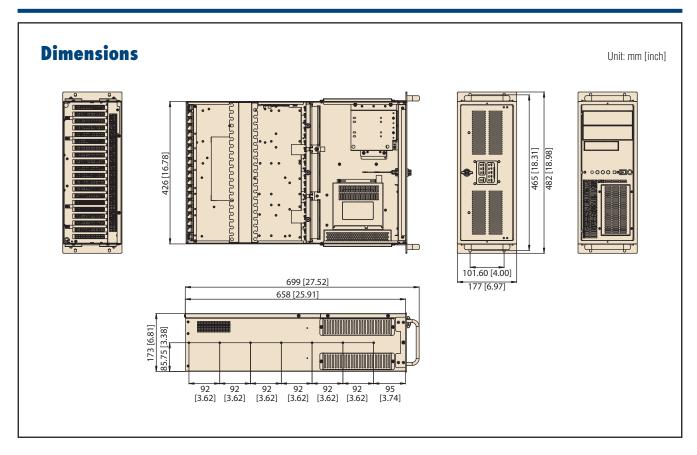

Ordering Information

Part number	Power Supply	Wattage	80 Plus grade	Switch Type
IPC-623BP-50ZC	96PS-A500WPS2G	500W	Gold	ATX switch
IPC-623BP-1KZC	96PS-A1K2WPS2*	1200W	Gold	ATX switch

Note: Choose power cord with IEC C19 plug for IPC-623BP-1KZC

Optional Accessories

Part Number	Description
IPC-DT-3120E	Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD trays
IPC-DT-5230E	Mobile rack for converting dual 5.25" drive bays to three 3.5" SATA HDD trays
1700002459	Reset button with wire
1600002166	AT switch
1700029268-01	Power cable for GPU card (Two 4-pin 12V connectors to one 6+2 pins PCIe power connector)
1700024754-01	Power cable for GPU card (Two B4P Molex connectors to one 6+2 pins PCIe power connector)

^{*} If GPU card with 2 power connectors, please use 1700029268-01*1 + 1700024754-01*1; If GPU card with 1 power connector, please use 1700029268-01.

Spare Parts

_	
Part Number	Description
2130004799S000	Side filter 45 x 200 x 6 mm
2130004800\$000	Door filter 130 x 95 x 6 mm

Backplane Options

•	-
Part Number	Description
PICMG 1.3 Backplane	
PCE-7B19-88B1E	2 PICeX8,8 PCIX,8 PCI
PCE-5B18-88B1E	1 PICeX16,8 PCIX,8 PCI
PCE-5B16Q-02A1E	Quad Seg BP,4 PCIeX16,8 PCI
PCE-5B12-00A1E	10 PCleX16, 1 PCleX4
PCE-5B19-00A1E	17 PCleX16, 1 PCleX4
PICMG 1.0 Backplane	
PCA-6120P18-0A2E	1 ISA, 17 PCI, 1 PICMG/PCI
PCA-6120P4-0B2E	14 ISA, 4 PCI, 1 PICMG/PCI
PCA-6119P7-0C2E	10 ISA, 7 PCI, 1 PICMG/PCI
PCA-6120P12-0A3E	7 ISA, 11 PCI, 1 PICMG/PCI
PCA-61200-0B3F	5-5-5-5 ISA

^{*} Only 500W or higher wattage PSU support 1700029268-01 and 1700024754-01 for high-end GPU card.