

Memory/Storage/
External I/O



Model Name	PCM-2300MR	PCM-2300TP	PCM-23C1CF	PCM-23U1DG
Description	MR4A16B, MRAM, 2MByte	TPM Compliant with TCG 1.2	CFast, Ejection Type I, CFast x 1	Locked USB Slot for USB Dongle, USB x 1
Spec	• 2MB MRAM Storage • Speed 6 MB/Sec	• TPM compliant with TCG 1.2	• 1 port CFast I/O card • CFast 3.0, Type I/II	• 1 port USB I/O card • USB A type w/lock

Communication



Model Name	PCM-24D2R4	PCM-24D2R2	PCM-24D4R4	PCM-24D4R2	PCM-24R2PE	PCM-24R2GL
Description	OXPCle-952 UART, Isolated 422/485, DB9 x 2	OXPCle-952 UART, Isolated RS-232, DB9 x 2	OXPCle-954 UART, Non-Isolated 422/485, DB37 x 1	OXPCle-954 UART, Non-Isolated RS-232, DB37 x 1	Intel i350, GbE, PoE IEEE 802.3af, PD, RJ45 x 2	Intel i350 PCIe, GbE, LAN Mini Card, RJ45 x 2
Spec	• Iso.2-ports, 2KVDC • RS-232/422/485		• Non-Iso, 4-ports • 50 bps ~ 921.6 kbps(RS-422/485)		• Intel i350 • 2 port 802.3af	• Intel i350 • 2 port 10/100/1000 LAN



Model Name	PCM-24R1TP	PCM-24U2U3	PCM-24S2WF	PCM-24S23G	PCM-24S24G
Description	Intel 82574L, GbE, IEEE 1588 PTP, RJ45 x 1	USB 3.0 Mini Card, USB x 2	802.11 a/b/g/n 2T2R w/ BT4.0, Atheros AR9462, SMA x 2	6-band HSPA Cellular Module, SIM Holder+GPS, SMA x 2	LTE Bands, UMTS/HSPA Bands, GPS/GPRS Bands, SMA x 2
Spec	• Intel 82574L chip • 9k jumbo frames, 802.1AS	• 2 port USB 3.0 • USB A type	• Atheros AR9462 • 802.11 a/b/g/n 2T2R w/ BT4.0	• 3.75G HSPA+GPS • 2-in-1, Full-size mPCIe Card w/SIM Card	• LTE bands • UMTS/HSPA GPS/GPRS bands

Fieldbus Protocol



Model Name	PCM-26D2CA	PCM-26D1PB
Description	SJA1000 CANBus, CANOpen, DB9 x 2	Hilscher netX100 FieldBus, ProfiBus, DB9 x 1
Spec	• CAN 2.0 A/B • 1Mbps, 16MHz	• Hilscher netX100 • 9.6kbps~12Mbps

Digital/
Analog I/O



Model Name	PCM-27D24DI
Description	Digital I/O, 16 DI / 8 DO, Isolation, DB37 x 1
Spec	• Iso. 16DI, 8DO • Iso. Protection 2.5KVDC

Naming Convention


PCM-26D2CA

Category	Connector	Port
23-Memory / Storage / External I/O	R-RJ45	0-No Connector
24-Communication	D-DB9	1-one connector
25-Display	U-USB	2-two connectors
26-Fieldbus		
27-Digital/Analog I/O		


Function				
PB-ProfiBus	PL-PowerLink	OF-Optical Fiber	DI-Digital I/O	U3-USB 3.0
PN-ProfiNet	PB-PoE	HD-HDMI	AI-Analog I/O	HD-HDMI
EI-Ethernet/IP	WF-WiFi/BT	TP-Precision Time Protocol	R4-Multi-drop RS-422/485	4G-4G/LTE
EC-EtherCAT	3G-3G/GPS	DC-Daisy-Chain	R2-Single-ended RS-232	DG-Dongle
AB-APAXBus	ZB-ZigBee	MR-MRAM	ID-Intelligent Displays	GL-Gigabit LAN
CA-CANOpen				

Advantech Innovative Design Concept- Simple, Flexible, Reliable

As a leading provider of Industrial PC, Advantech devoted to Innovation product/service development. To be the pioneer in intelligent automation technology, the i-concept represents the intelligent, integrated and intuitive design which covers the innovation of service model, user behavior and cutting-edge technology that opens a new era of industrial automation.



An integrated intelligent key brings simplified intuitive operation for configuring your automation panel. With a flexible software design, customized functions are easier to carry out.



A standardized modular Interface which offers flexible expansion to increase the number of applications and expand system functions through the variety of standardized modular I/Os.



A Reliable Long Distance Transmission Technology which transfers video signals and touch control over a single Ethernet cable which overcomes interference in harsh environments not only for data connections, but also for a cost effective multiple display solution.

Regional Service & Customization Centers

China	Taiwan	Netherlands	Poland	USA/ Canada
Kunshan 86-512-5777-5666	Taipei 886-2-2792-7818	Eindhoven 31-40-267-7000	Warsaw 48-22-33-23-740/ 741	Milpitas, CA 1-408-519-3898

Worldwide Offices

Greater China

China	
Toll Free	800-810-0345
Beijing	86-10-6298-4346
Shanghai	86-21-3632-1616
Shenzhen	86-755-8212-4222
Chengdu	86-28-8545-0198
Hong Kong	852-2720-5118

Taiwan	
Toll Free	0800-777-111
Neihu	886-2-2792-7818
Xindian	886-2-2218-4567
Taichung	886-4-2378-6250
Kaohsiung	886-7-229-3600

Asia Pacific

Japan	
Toll Free	0800-500-1055
Tokyo	81-3-6802-1021
Osaka	81-6-6267-1887

Korea	
Toll Free	080-363-9494
Seoul	82-2-3663-9494

Singapore	
Singapore	65-6442-1000

Malaysia	
Toll Free	1800-88-1809
Kuala Lumpur	60-3-7725-4188
Penang	60-4-537-9188

Indonesia	
Jakarta	62-21-769-0525

Thailand	
Bangkok	66-2-248-3140

India	
Toll Free	1800-425-5070
Pune	91-20-39482075
Bangalore	91-80-2545-0206

Australia	
Toll Free	1300-308-531
Melbourne	61-3-9797-0100
Sydney	61-2-9476-9300

Europe

Toll Free	00800-2426-8080
-----------	-----------------

Germany	
München	49-89-12599-0
Hilden / D'dorf	49-2103-97-885-0

France	
Paris	33-1-4119-4666

Italy	
Milano	39-02-9544-961

Benelux & Nordics	
Breda	31-76-5233-100

UK	
Reading	44-0118-929-4540

Poland	
Warsaw	48-22-33-23-740/41

Russia	
Toll Free	8-800-550-01-50
Moscow	7-495-232-1692

Americas

North America	
Toll Free	1-888-576-9668
Cincinnati	1-513-742-8895
Milpitas	1-408-519-3898
Irvine	1-949-420-2500

Brazil	
Toll Free	0800-770-5355
Saude-São Paulo	55-11-5592-5355

Mexico	
Toll Free	1-800-467-2415
Mexico City	52-55-6275-2777

Advantech iDoor Technology

Standardized interface which offers flexible expansion to system functions via a variety of modular I/Os



- Introduction
- Features & Functions
- Benefits & Advantages
- Selection Guide
- Naming Convention



ADVANTECH

Enabling an Intelligent Planet

ADVANTECH

Enabling an Intelligent Planet

www.advantech.com

Please verify specifications before quoting. This guide is intended for reference purposes only. All product specifications are subject to change without notice. No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher. All brand and product names are trademarks or registered trademarks of their respective companies. © Advantech Co., Ltd. 2012



Advantech iDoor Technology

Leading Industrial PC Trends

Advantech's innovative iDoor technology is a new modular way of adding flexible functionality to a wide range of devices. iDoor Technology gives system integrators the flexibility to choose functions they need without purchasing costly extra devices with functions they'll never use. By using standardized components and interfaces integrators can leverage current state-of-the-art technologies as well as up and coming IPC trends. For instance, as embedded operating systems improve and higher performance storage methods become widely available, the IPC supplier is able to seamlessly integrate them into the product line for their customers.



Simple, Flexible, Reliable

The optimized mechanism design simplify iDoor with I/O plate, I/O module, and mPCIe card. It makes it easier to assemble and install. Modular design makes iDoor high flexibility for any configuration. With Advantech's rugged and strict design and comprehensive testing, iDoor provides a reliable offering.



Easy Maintenance


With Advantech's iDoor mechanical design, the user finds it easy to install iDoor into many kinds platform and fixes into the chassis. iDoor also provides a standard cable for internal cable routing and management. With the captive screw and locked USB which is easy for users to maintain.



Standard Interface

The standard dimensions of a 81 x 19.4mm I/O plate with mPCIe interface supports the following models:

- Embedded Automation Computers UNO-2200/2300/2400 series
- Embedded DIN-Rail Controller UNO-1200/1300/1400 series
- Embedded BOX IPC UNO-3000 series
- Embedded Automation Panel Computers TPC-xx82/xx72/xx80 series





Versatile Color Identification

For easy identification, iDoor has opted to use a color convention that represents the primary colors of their logos. For Example, the red is the most obvious color for EtherCAT logo, so the I/O plate color is defined as PANTONE 1795C and the black is the representative color of the POWERLINK logo, consequently, we used a black a plate.



Integration of Multiple Functions

With the versatile functionality of iDoor, the system is suitable for different vertical applications. iDoor application modules include memory/storage/external I/O, fieldbus protocol (Ethernet/IP, Profibus, Profinet, EtherCAT, Powerlink, and so on), communications WAN / MAN / LAN, and digital / analog I/O.

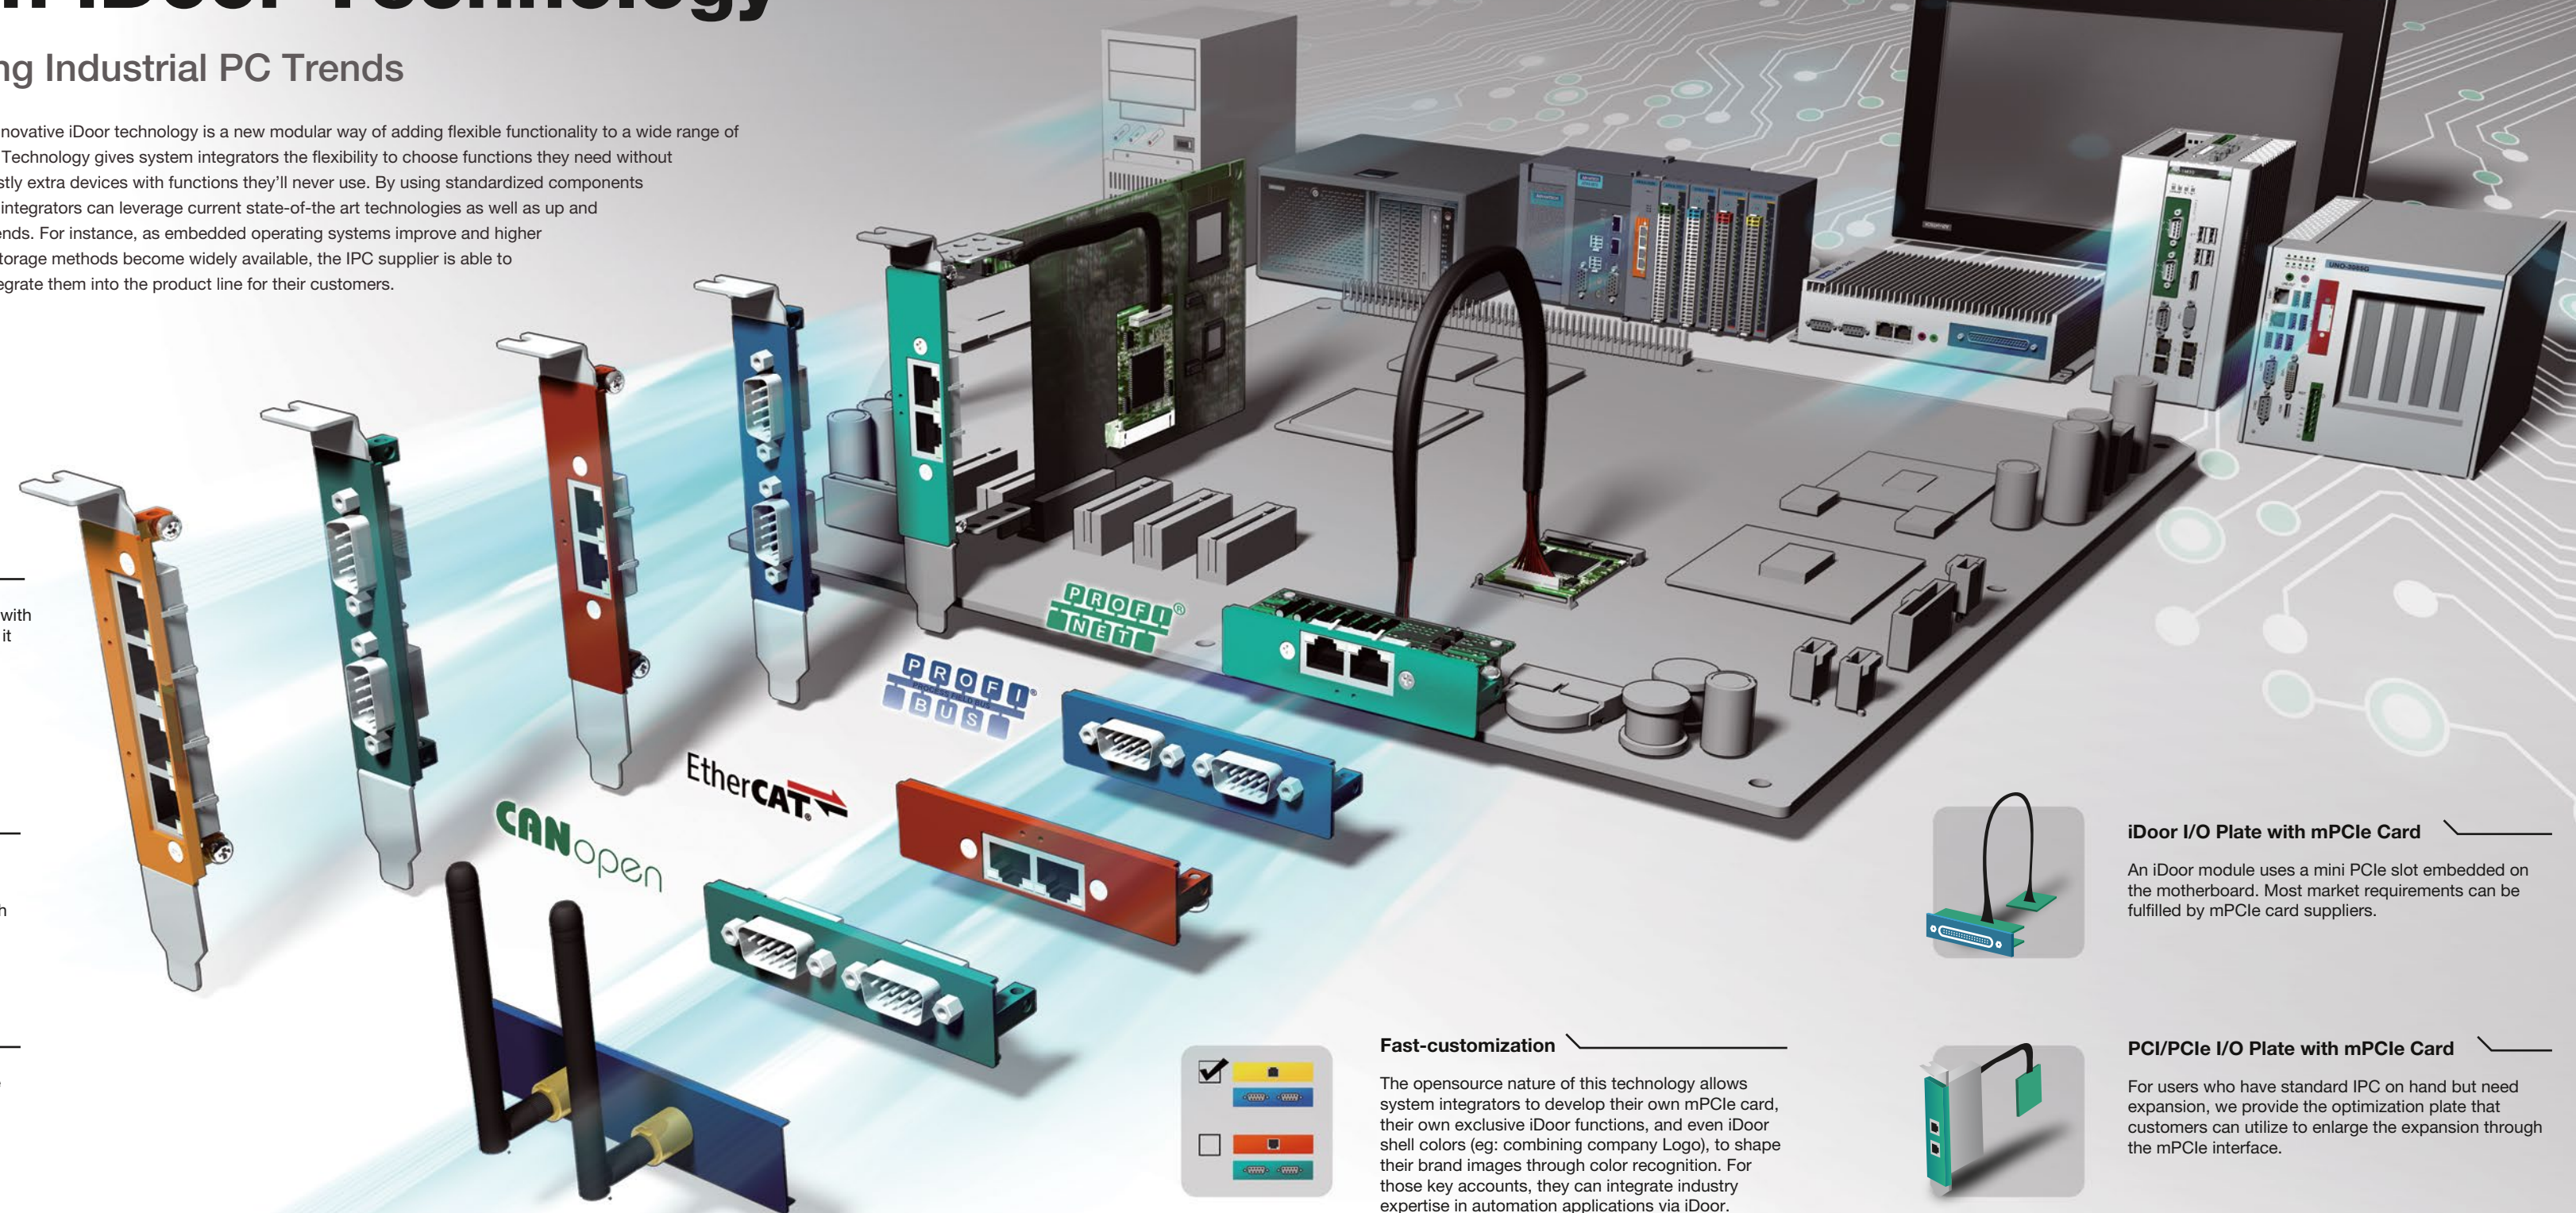


Fast-customization

The opensource nature of this technology allows system integrators to develop their own mPCIe card, their own exclusive iDoor functions, and even iDoor shell colors (eg: combining company Logo), to shape their brand images through color recognition. For those key accounts, they can integrate industry expertise in automation applications via iDoor.




Supports Different Platforms

iDoor Technology is not only designed to work exclusively with Advantech's products but also gives system integrators the ability to use iDoor modules on any industrial PC that has a spare PCIe slot. With the extended plate and adapter solution, it will be suitable for the IPC platform. The flexible design will make iDoor fulfill any other 3rd party uses.



iDoor I/O Plate with mPCIe Card

An iDoor module uses a mini PCIe slot embedded on the motherboard. Most market requirements can be fulfilled by mPCIe card suppliers.



PCI/PCIe I/O Plate with mPCIe Card

For users who have standard IPC on hand but need expansion, we provide the optimization plate that customers can utilize to enlarge the expansion through the mPCIe interface.



PCI/PCIe I/O Plate with mPCIe Card in PCIe Adapter Card

Some customers need more expansion but are limited by the number of available mPCIe slots. We provide a PCIe adapter which gives an additional mPCIe slot which connects through an existing PCIe slot to maximize the expansion.