


Introduction

This office dock provides extra ports for RX10 and has a slot for charging an additional battery pack.

With peripherals such as a keyboard, mouse, monitor, and printer all connected to the office dock, you can simply dock your RX10 and turn it into a desktop computer.

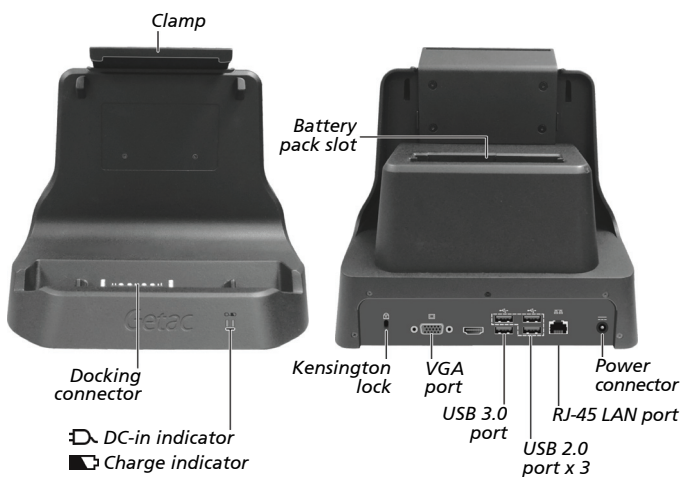

Docking and Undocking

To dock RX10:

1. Align and seat RX10 on the office dock. A small triangle on both the office dock and RX10 indicates the center point to align with (❶). The docking connector on RX10 should connect the corresponding connector on the dock.
2. Lift the clamp, lean RX10 against the dock, and place the clamp over RX10 (❷).



3. Connect the cables of peripheral devices to the corresponding connectors on the office dock.
4. Connect the AC adapter (supplied with the office dock) to the power connector of the office dock.

Connect the power cord (supplied with the office dock), one end to the AC adapter and the other end to an electrical outlet.

The DC-in indicator (⏻) lights up.

NOTE: Power is supplied to RX10 by the office dock. Do not have the docked RX10 connect its own AC adapter.


To unlock RX10:

Push up the clamp to release RX10 and then detach RX10 from the dock.



Charging an Additional Battery Pack

You can charge an additional battery pack by inserting it in the back slot of the office dock.

When a battery pack is inserted and the office dock is connected to power, the Charge indicator () on the dock shows the charging status:

- lights in orange when the battery pack in the slot is being charged.
- lights in green when the battery pack in the slot is fully charged.
- flashes in amber to indicate a charging problem.



NOTE: When RX10 is docked, the battery pack in the back slot and the battery pack inside RX10 will be charged in parallel.

Notes and Precautions

- **DO NOT** touch the connectors of the office dock.
- **DO NOT** attempt to make connections if there is any object between RX10 and the office dock. Doing so could damage RX10 and the office dock.
- **DO NOT** attempt to move the office dock when it is connected to RX10.
- If RX10 malfunctions while the office dock is connected, turn off RX10 and disconnect the office dock. Connect the AC adapter to RX10 and check to see if RX10 operates normally. If RX10 operates normally, the office dock may be malfunctioning.
- **DO NOT** place metal objects or containers of liquid on top of the office dock. If metal objects (such as paper clips and coins) or any liquid spills get inside the office dock, fire or electric shock may result. Immediately unplug the power cable and remove RX10 from the office dock.
- Unplug the power cord and remove RX10 from the office dock if any of the following occurs:
 - the office dock is damaged
 - smoke is emitted
 - an unusual smell is emitted
 - the office dock is unusually hotContinuing to use the office dock while any of the above conditions are present may result in fire or electric shock.



Depending on the specific model purchased, the look and color scheme of your device and accessories may not exactly match the graphics shown in this guide.