



UX10 FULLY RUGGED TABLET


- 8th Generation Intel® Core™ i7/i5 Processor
- 10.1" FHD LumiBond® 2.0 Display with Getac Sunlight Readable Technology (1,000 nits) and Capacitive Touchscreen
- Enhanced Enterprise Security with Optional Intel vPro™, Windows Hello Face-authentication Camera and Multi-factor Authentication Options
- Detachable Keyboard and Multifunctional Hard Handle for On-the-job Flexibility
- Multiple Configurable Options to Fit Diverse Usage Scenarios



Detachable Keyboard



Hard Handle

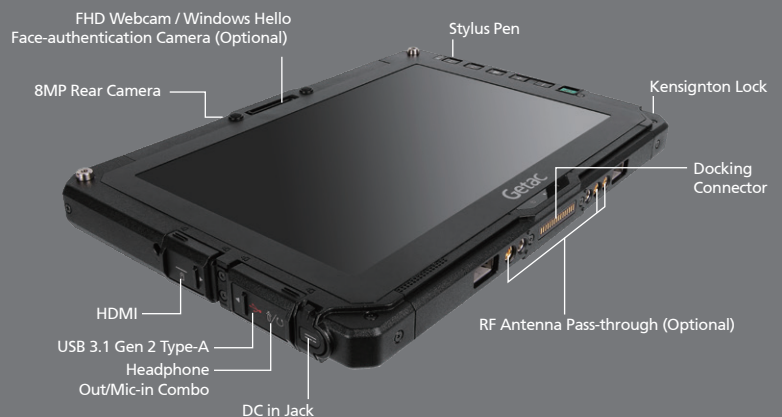

Specifications

Operating System

Windows 10 Pro

Mobile Computing Platform

Platform Options:

Intel® Core™ i7 Technology

Intel® Core™ i7-8565U Processor 1.8 GHz

Max. 4.6GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7 vPro™ Technology

Intel® Core™ i7-8665U vPro™ Processor 1.9GHz

Max. 4.8 GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i5 Technology

Intel® Core™ i5-8265U Processor 1.6GHz

Max. 3.9GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

Intel® Core™ i5 vPro™ Technology

Intel® Core™ i5-8365U vPro™ Processor 1.6GHz

Max. 4.1 GHz with Intel® Turbo Boost Technology
- 6MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics 620

Display

10.1" IPS TFT LCD FHD (1920 x 1200)

1000 nits LumiBond® display with Getac sunlight

readable technology

Capacitive multi-touch screen

Storage & Memory

8GB DDR4 expandable to 16GB

Optional SSD 256GB / 512GB / 1TB

Keyboard

6 tablet buttons (Windows, Power, Function Key, Camera Capture/Barcode Reader Trigger, Volume Up, Volume Down)

Pointing Device

Touchscreen

- Capacitive multi-touch screen

- Optional dual mode touchscreen (multi-touch and digitizer)

Expansion Slot

Optional 1D/2D imager barcode reader, or HF RFID readerⁱ, or serial port, or LAN port (RJ45), or USB 3.0 port, or VGA port^g

Optional magnetic stripe readerⁱⁱⁱ, or fingerprint scanner, or serial port+LAN port (RJ45)^{iv}

Optional smart card reader, or bridge battery, or bridge battery+smart card reader^v

I/O Interface

FHD webcam x 1 or Optional Windows Hello

face-authentication camera (front-facing) x 1

8M pixels auto focus rear camera x 1

Headphone out / mic-in combo x 1

DC in Jack x 1

USB 3.1 Gen 2 Type-A x 1

HDMI x 1

Docking connector x 1

Optional RF antenna pass-through for GPS,

WLAN and WWAN

Communication Interface

Optional 10/100/1000 base-T Ethernet

Intel® Dual Band Wireless-AC 9260, 802.11ac

Bluetooth (v5.0)^h

Optional 4G LTE mobile broadband with integrated GPS

Security Feature

Optional Intel® vPro™ Technology

TPM 2.0

Optional HF RFID reader^{i,ii}

Optional magnetic stripe readerⁱⁱⁱ, or fingerprint scanner^{iv}

Optional smart card reader^v

Kensington lock

Power

AC adapter (65W, 100-240VAC, 50 / 60Hz)

Li-Ion smart battery (11.1V, 4200mAh) x 1

Optional high capacity battery (10.8V, 9240mAh) x 1

Optional bridge battery^g

Dimension (W x D x H) & Weight

276.8 x 194.5 x 23.5 mm (10.89" x 7.65" x 0.92"),

1.22 kg (2.68 lbs)^h

Rugged Feature

MIL-STD-810G certified and IP65 certified

MIL-STD-461G certifiedⁱⁱⁱ

6 feet drop resistant^{ix,x}

e-Mark certified for vehicle usage

Environmental Specification

Temperature^g:

- Operating: -29°C to 63°C / -20°F to 145°F

- Storage: -51°C to 71°C / -60°F to 160°F

Humidity:

- 95% RH, non-condensing

Software

Getac Utility

Getac Camera

Getac Geolocation

Getac Barcode Manager

Optional Absolute DDS® Persistence

Accessories

Carry bag

Multi-bay charger (Dual Bay)

Multi-Bay charger (Eight-Bay)

Vehicle adapter (120W, 11-32VDC)

AC adapter (65W, 100-240VAC)

Office dock AC adapter (90W, 100-240VAC)

MIL-STD-461 certified AC adapter (90W, 100-240VAC)

Digitizer pen

Capacitive stylus (Hard-tip)

Protection film

Tablet folio case

Hand strap

Shoulder harness (4-point; handsfree)

Shoulder strap (2-point)

Standard battery (11.1V, 4200mAh)

High capacity battery (10.8V, 9240 mAh)

Detachable keyboard

Vehicle dock

Office dock

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our new Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee.

That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

- i 13.56MHz Contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FelICa™ compliant).
- ii 1D/2D imager barcode reader, HF RFID reader, serial port, LAN port (RJ45), USB 3.0 port and VGA port are mutually exclusive options.
- iii Not Energy Star 7.0 compliant.
- iv Magnetic stripe reader, fingerprint scanner and serial port+LAN port (RJ45) are mutually exclusive options.
- v Smart card reader, bridge battery and bridge battery+smart card reader are mutually exclusive options.
- vi Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- vii Weight and dimensions vary from configurations and optional accessories.
- viii MIL-STD-461G 90W AC adapter sold separately.
- ix Drop test results vary from configurations and optional accessories.
- x Tested by a national independent third party test lab following MIL-STD-810G.

UX10

Fully Rugged Tablet



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	1	1
VGA	--	1
Microphone	--	1
Audio Output	--	1
DC in Jack	1	1
USB	USB 3.0 x2 USB 2.0 x2	USB 3.0 x2 USB 2.0 x2
LAN	1	1
HDMI	--	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	--
Kensington Lock	1	1

Getac

GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd.,
Nangang Dist., Taipei City, 11568, Taiwan, R.O.C.

Tel : +886 2 2785 7888

globalmarketing@getac.com | www.getac.com



Copyright © 2019 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference only,
available specification shall be subjected to quotation by request. V01M07Y19WV